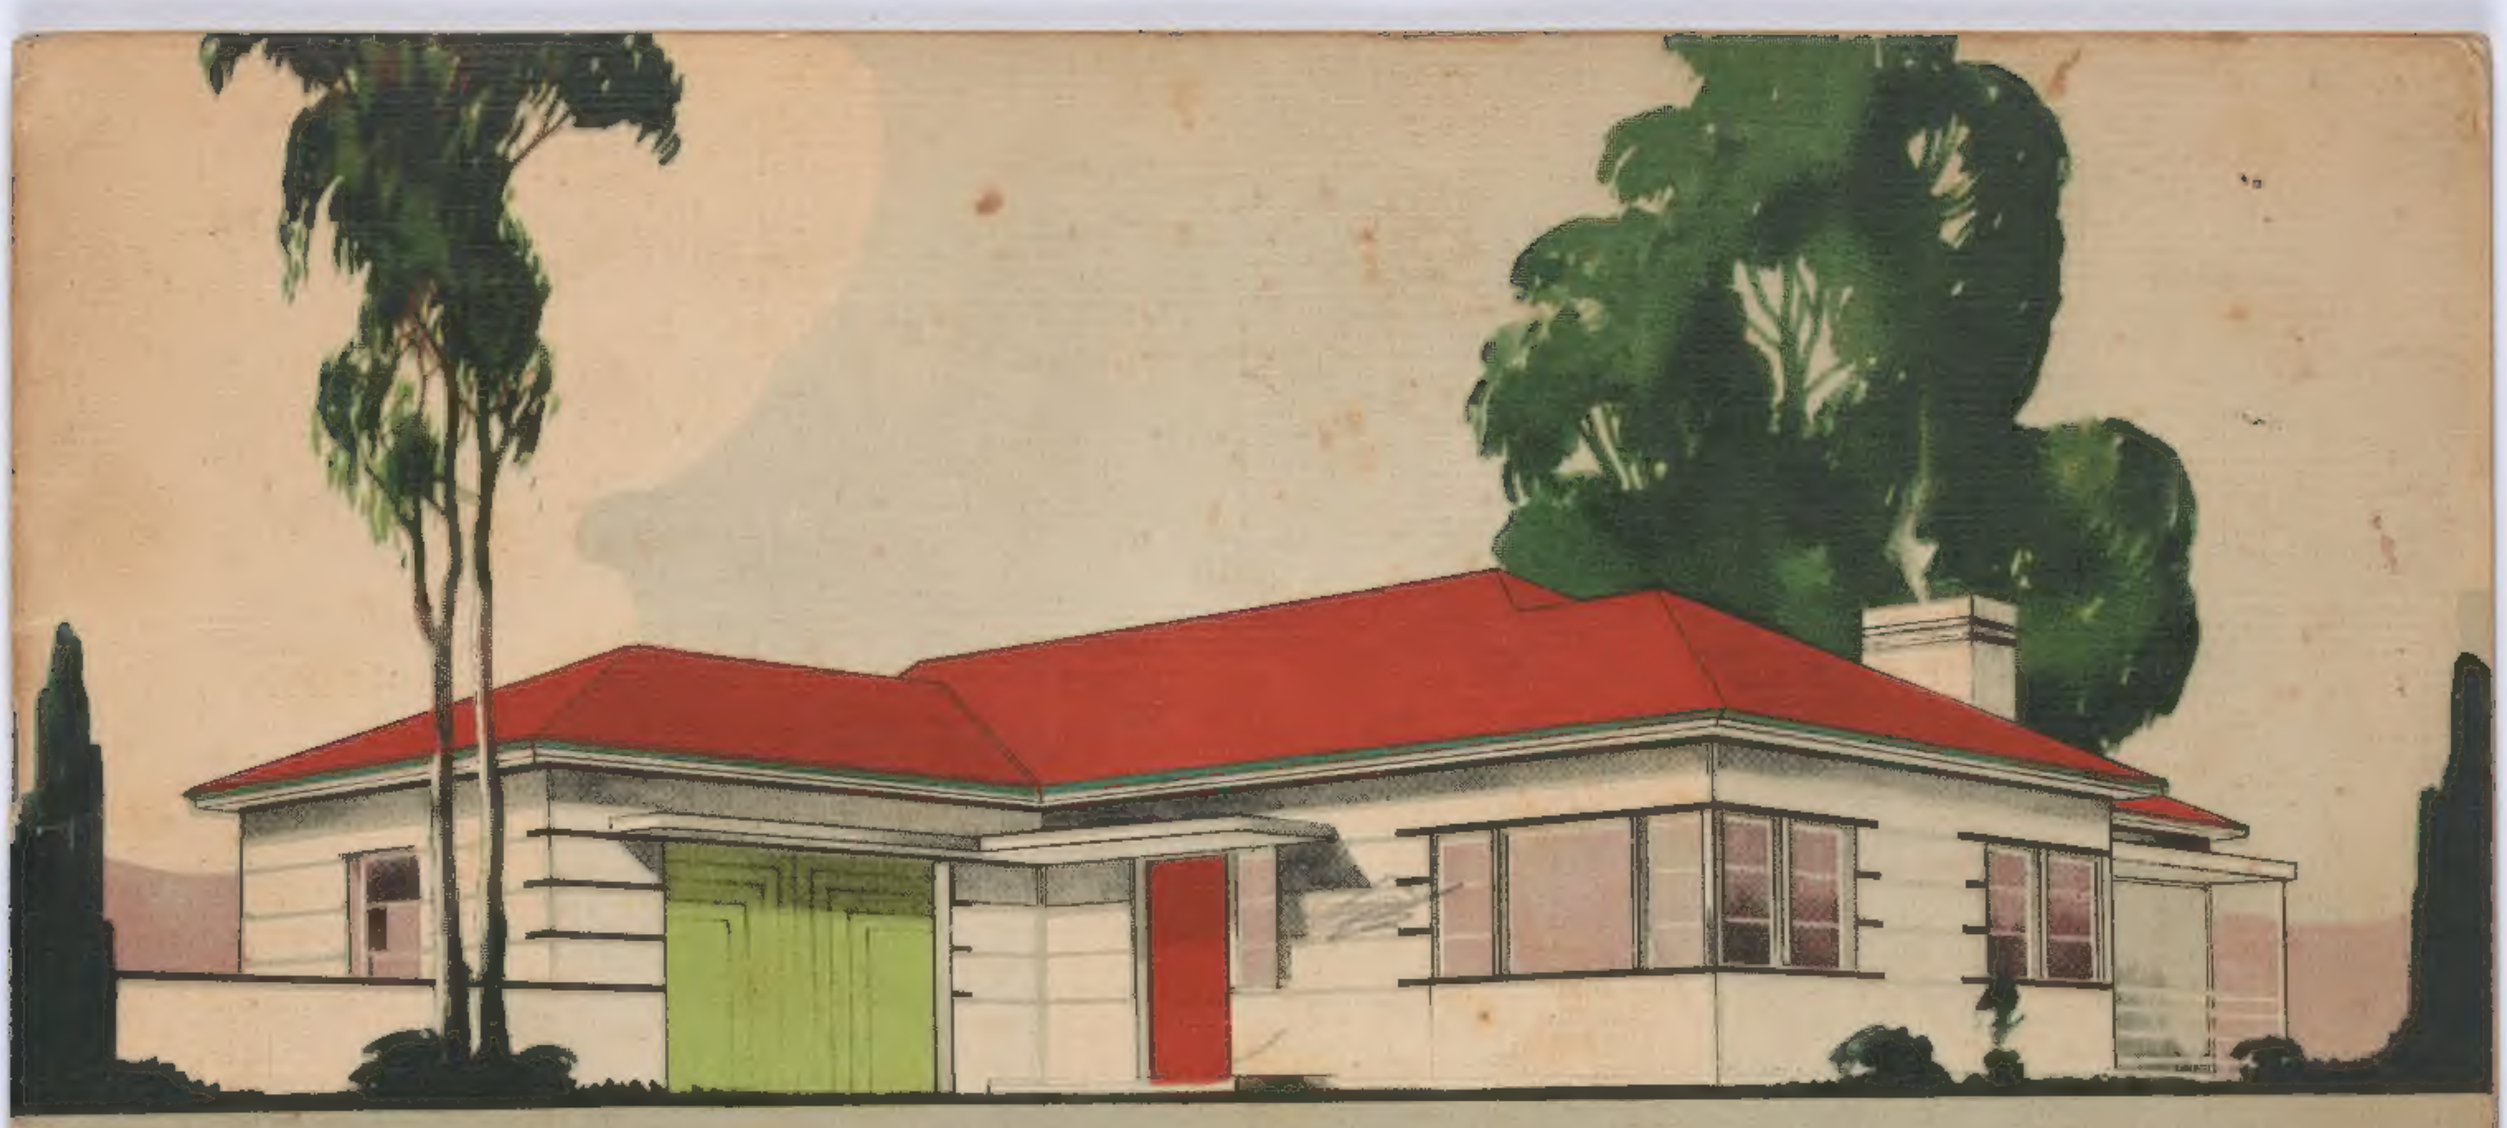

WUNDERLICH DURABESTOS HOMES

WUNDERLICH LIMITED, MANUFACTURERS

3 63271
TC 691 WUN

VIRTUALLY A PREPARED WALL

WUNDERLICH DURABESTOS

Asbestos-Cement Building Sheeting

A SHEET OF WUNDERLICH DURABESTOS, MEASURING 8 FEET BY 4 FEET, BEING PLACED IN POSITION.

Wunderlich Durabestos is the most convenient, economical, and effective building sheeting available to-day for lining the exterior walls, gables and interior walls, ceilings and partitions of all timber-framed buildings.

It is made in broad, rigid sheets in stock sizes ranging from lengths of 3' to 12' by widths of 4', 3', 2' and 1'6". It can be handled, cut and fixed even more quickly than timber linings. In addition, Durabestos is tough and weather-resisting. It is of a pleasing grey-white that does not require painting unless colourful treatment is desired.

WUNDERLICH Durabestos Products are obtainable from leading storekeepers, builders' suppliers and timber merchants throughout Australia and New Zealand.

WUNDERLICH DURABESTOS BUILDING SHEETS

WUNDERLICH DURABESTOS

Minimises Labour — Reduces Cost — Builds Better Sturdier

HOMES

To the many home-lovers who are desirous of owning an inexpensive yet attractive home, this booklet will prove of great interest and assistance. Its object is to portray the freedom with which Wunderlich Durabestos (Asbestos-Cement) Products can be used when designing economical and inviting timber-framed structures, and to illustrate the modern effects obtainable when the sheets and cover battens are applied HORIZONTALLY.

WUNDERLICH DURABESTOS Flat Building Sheeting is the most economical, convenient and effective material available to-day for lining the exterior walls and gables and the interior walls, partitions and ceilings of timber-framed buildings. It has been successfully applied to thousands of houses and buildings in both suburban areas and country districts in Australia, and the adjacent islands. Many of these homes have been financed by easy term Government loans—for Durabestos construction is accepted by the authorities who make the grants available.

WUNDERLICH DURABESTOS is Australian made and has for its constituents two pre-eminently indestructible materials — ASBESTOS FIBRE and PORTLAND CEMENT. During manufacture the cement-coated asbestos fibres are interlaced and built up in laminations into a dense sheet of the requisite thickness. The resultant product possesses outstanding characteristics, for it is weather, white-ant and vermin-proof, is fire-resisting and thoroughly durable. In addition, Wunderlich Durabestos Sheeting is easily handled, sawn, nailed and fixed, thus reducing labour costs of application to a minimum. The smooth surface finish is of a pleasing grey-white colour; painting is, therefore, unnecessary and upkeep costs of a Durabestos structure are practically eliminated. However, Durabestos may be painted, if desired, special instructions being given on page 19.

Homebuilders who have in mind utmost attractiveness and permanence, combined with moderate cost, should specify Wunderlich Durabestos, for it is the building sheeting that will enable them, most effectively, to carry out their scheme. The designs furnished in this booklet are intended as a guide to all; before they are adopted a local architect should be consulted, for by amending them to suit individual requirements and the orientation of the building, money will be saved and inconvenience obviated.

WUNDERLICH LIMITED cannot undertake the preparation of plans and specifications or the construction of Durabestos homes. This should be entrusted to a recognised architect and a capable builder.

WUNDERLICH LIMITED

MANUFACTURERS OF BUILDING MATERIALS OF QUALITY

Administration: BAPTIST STREET, REDFERN, SYDNEY

Durabestos Works: CABARITA, N.S.W.; SUNSHINE, VIC.; GAYTHORNE, QUEENSLAND

SHOWROOMS AND OFFICES:

SYDNEY	SOUTH MELBOURNE	ADELAIDE	BRISBANE
Baptist Street, Redfern	210 Hanna Street (near Sturt St.)	Cnr. Grote and Morphett Sts.	Amelia Street, Valley
NEWCASTLE	PERTH	HOBART	LAUNCESTON
King Street (near Watt Street)	Lord and Short Streets	139 Macquarie Street	71 St. John's Street

CATALOGUE D52. 1/1/1938.

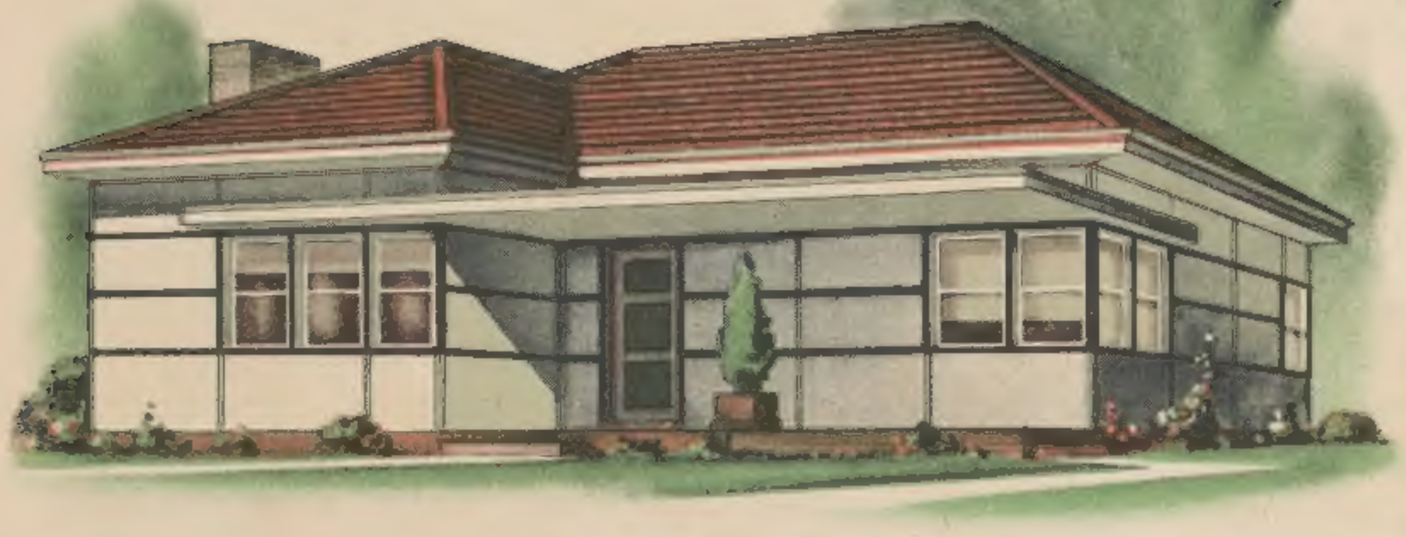

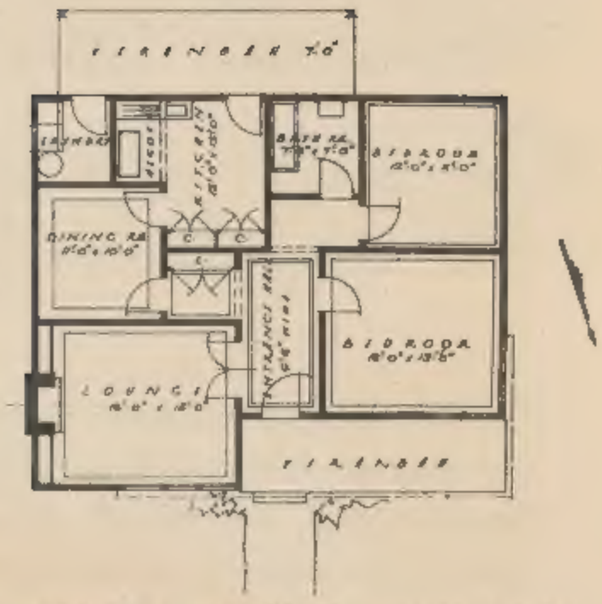

WUNDERLICH DURABESTOS HOME DESIGN,
No. 201.

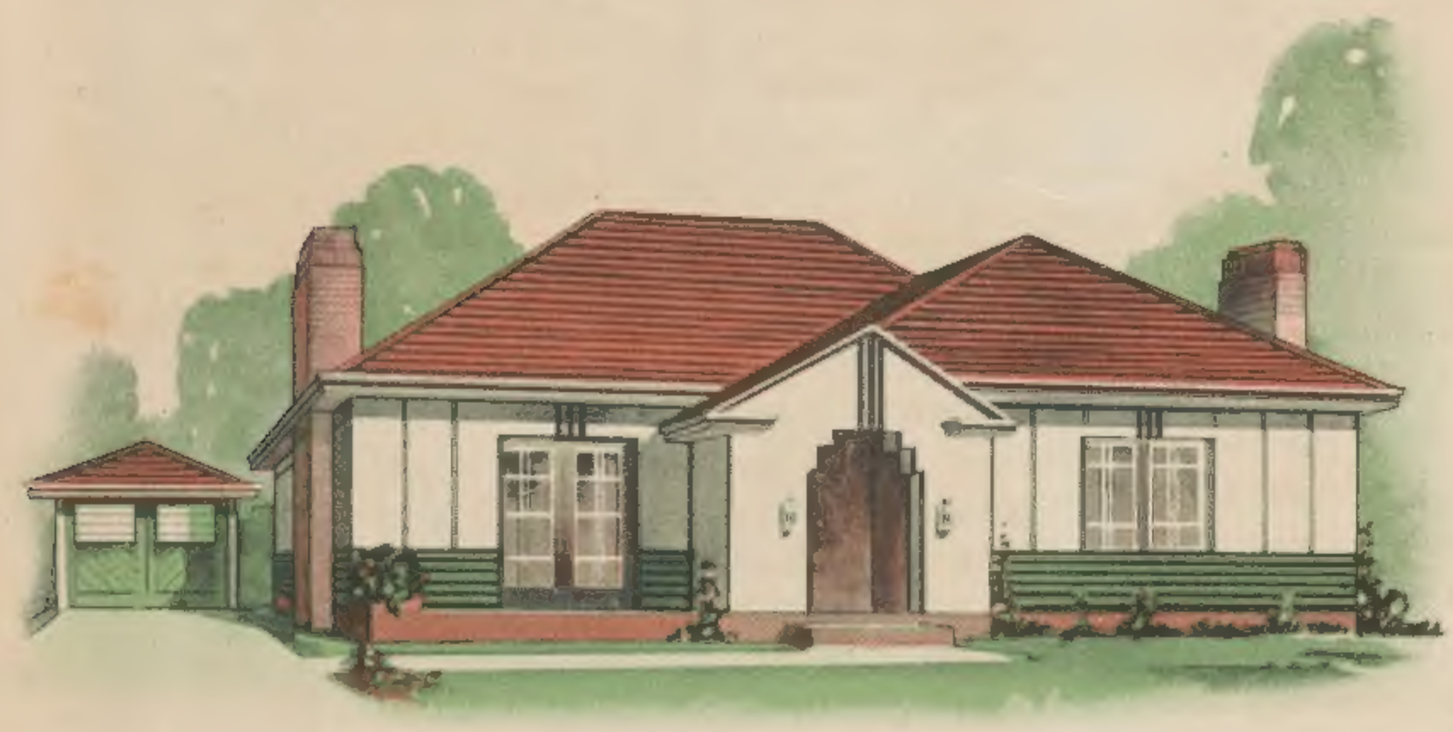

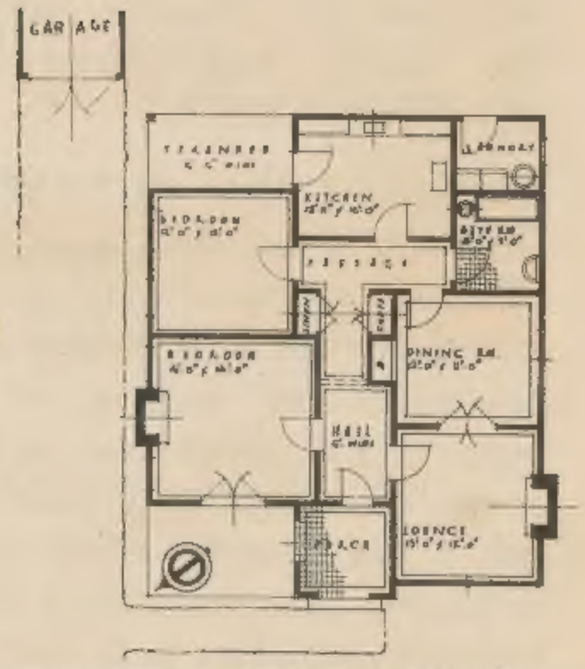

WUNDERLICH DURABESTOS HOME DESIGN,
No. 202.

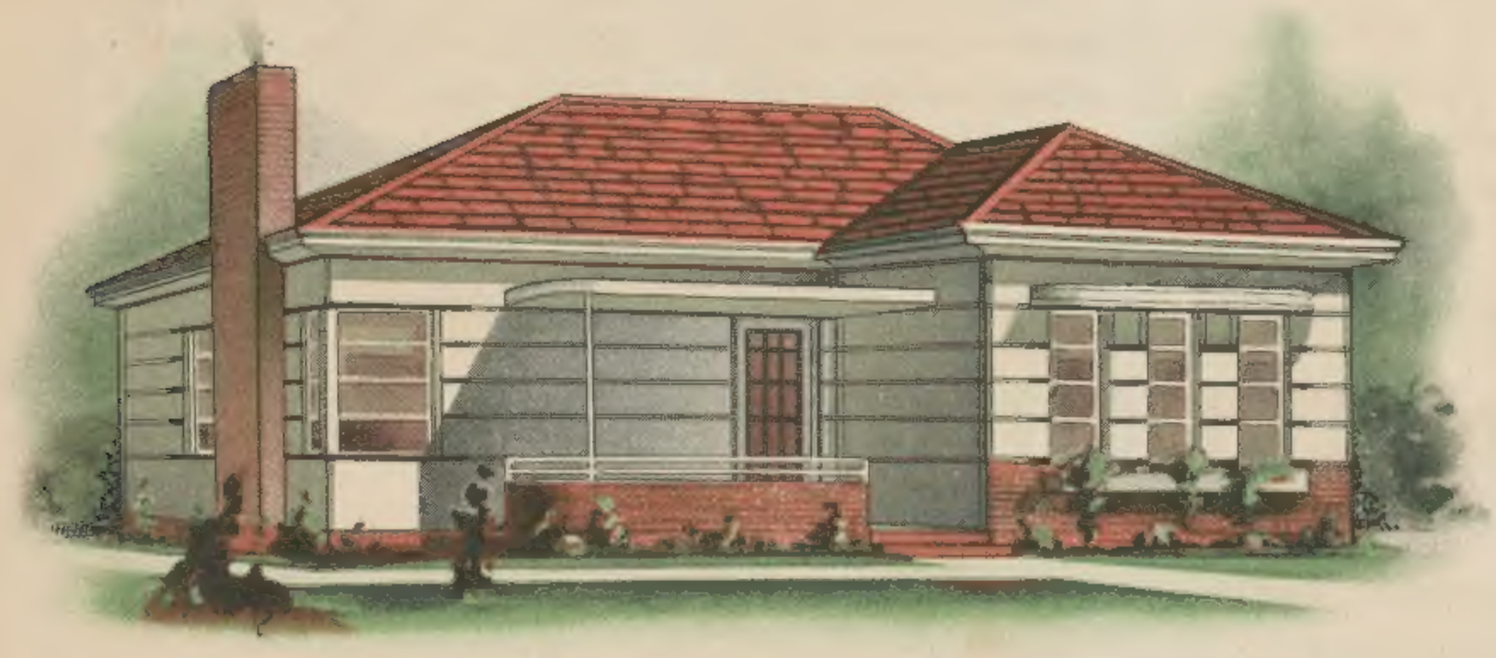

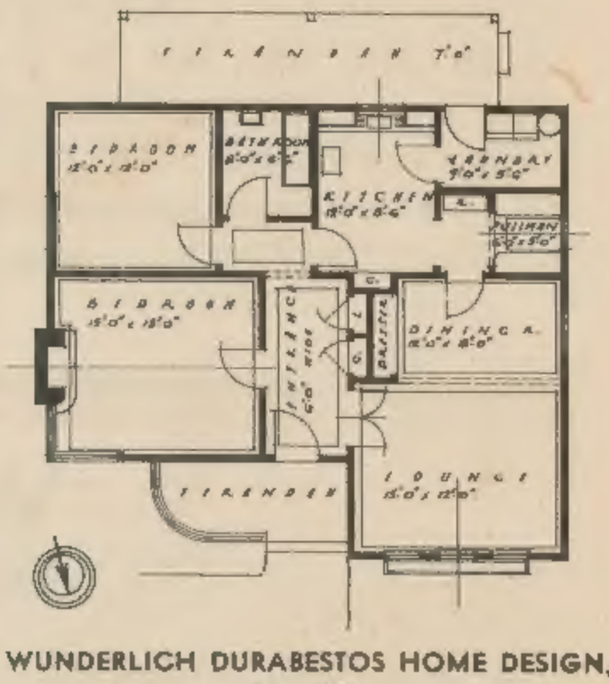

WUNDERLICH DURABESTOS HOME DESIGN,
No. 203.

WUNDERLICH DURABESTOS BUILDING SHEETS

WUNDERLICH DURABESTOS HOME DESIGN No. 204

ROOFED WITH WUNDERLICH TERRA COTTA TILES

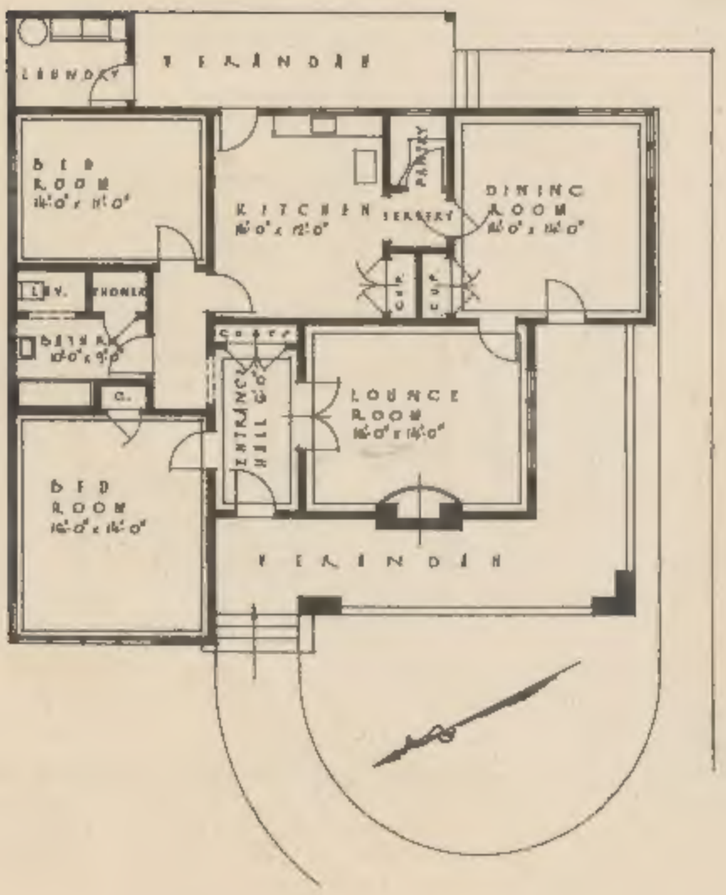

The Wunderlich Durabestos Homes illustrated have been carefully planned to suit Australian conditions; the logical arrangement of living spaces ensures maximum comfort and convenience. When built of Durabestos Asbestos-Cement Products they are of sound construction, attractive, yet economical in initial cost. A roof of colourful Wunderlich Terra Cotta Tiles and Fireplaces of Colortex Brickettes add to their attractiveness.

Before arranging to build any of these homes have an Architect prepare complete plans and specifications—then engage a competent Builder.

TAKE ADVANTAGE OF A GOVERNMENT LOAN TO BUILD A DURABESTOS HOME

WUNDERLICH DURABESTOS BUILDING SHEETS

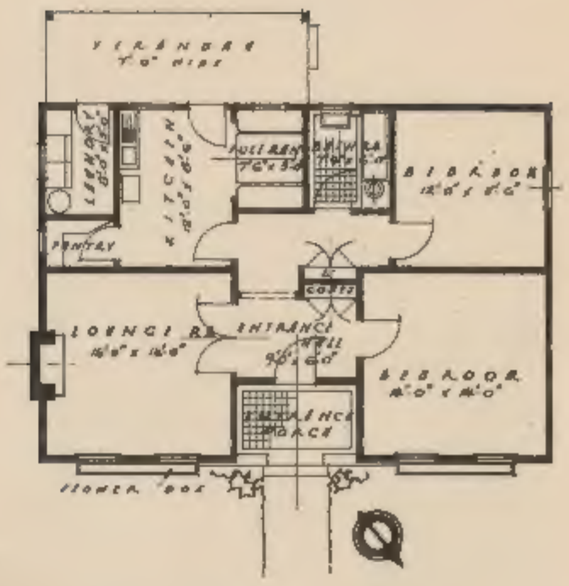

WUNDERLICH DURABESTOS HOME DESIGN,
No. 205.

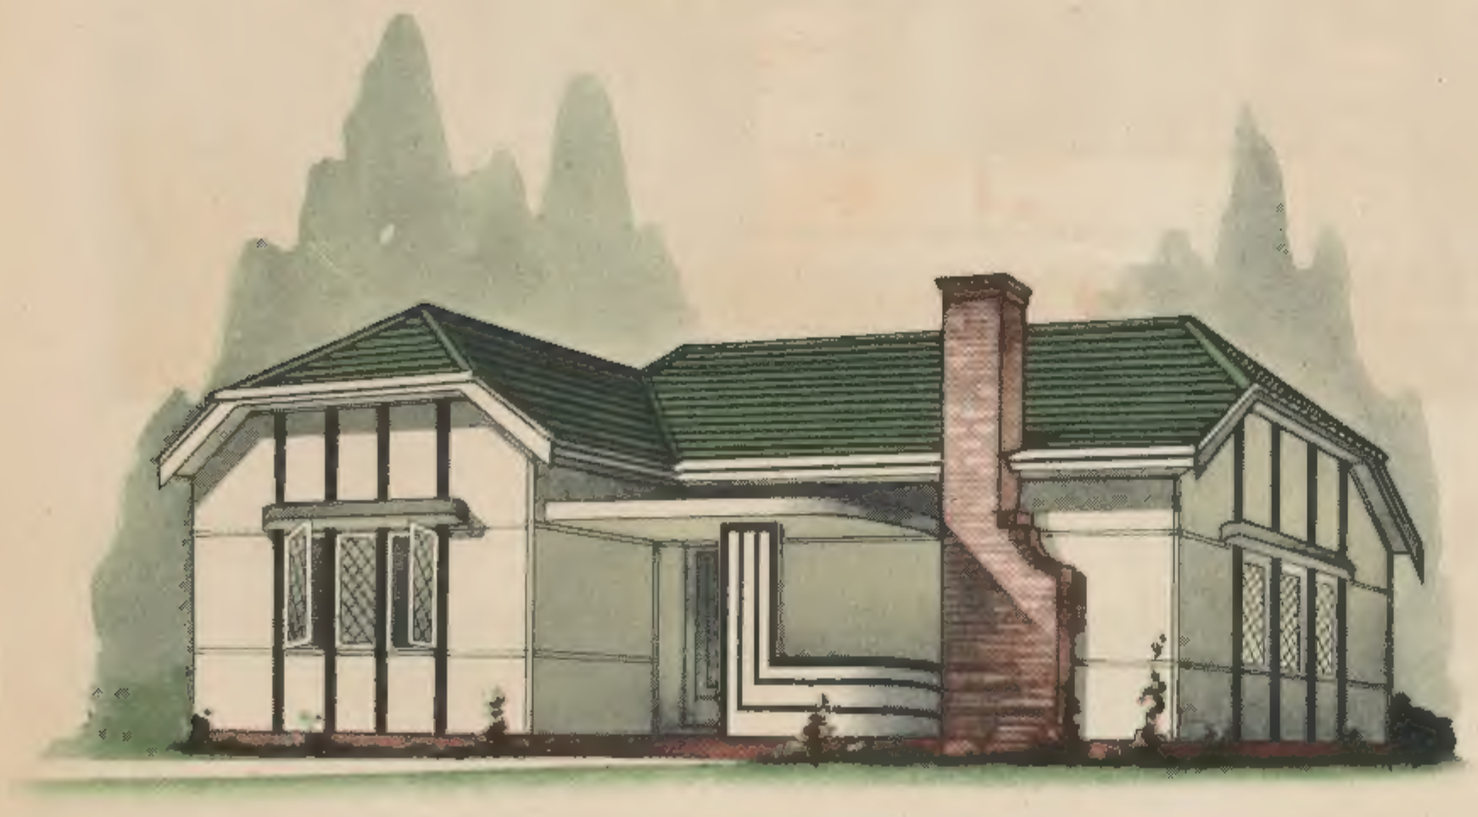

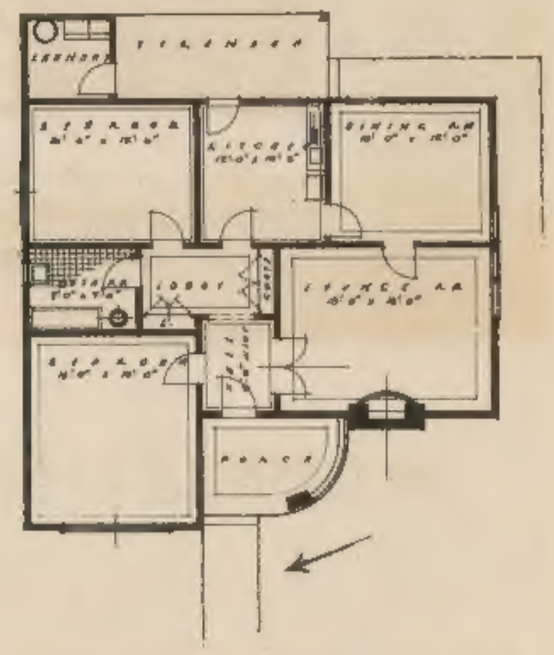

WUNDERLICH DURABESTOS HOME DESIGN,
No. 206.

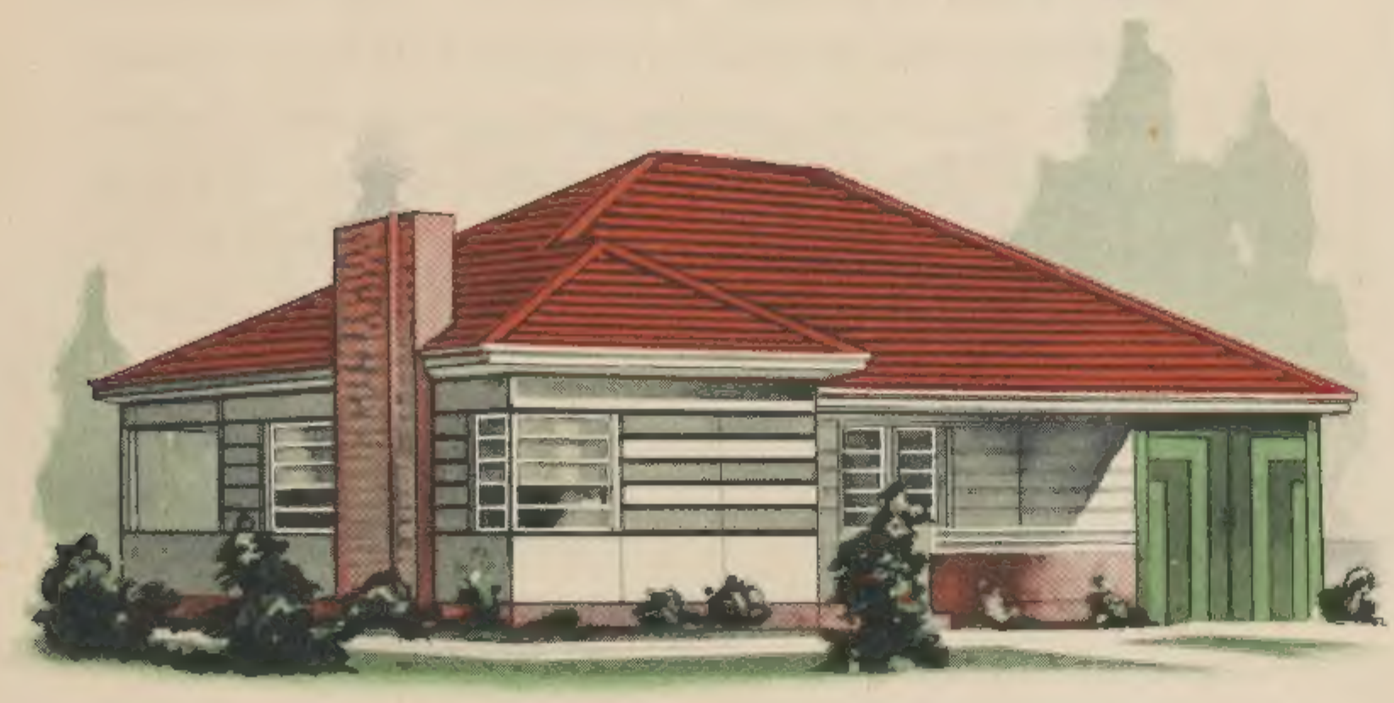

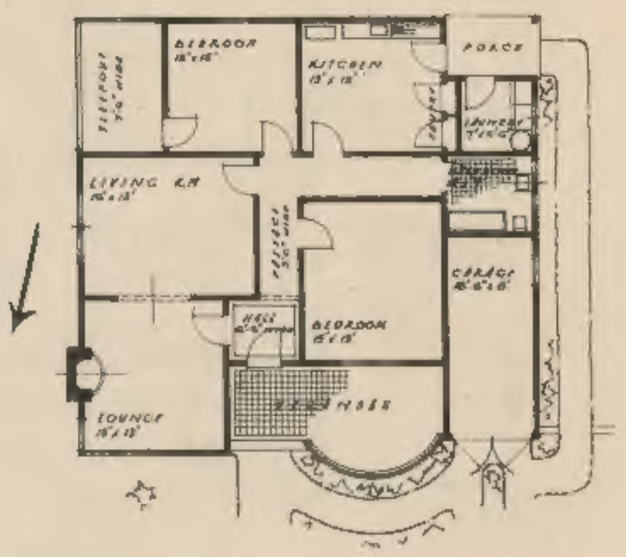

WUNDERLICH DURABESTOS HOME DESIGN,
No. 207.

WUNDERLICH DURABESTOS BUILDING SHEETS

WUNDERLICH DURABESTOS HOME DESIGN No. 208

ROOFED WITH WUNDERLICH TERRA COTTA TILES

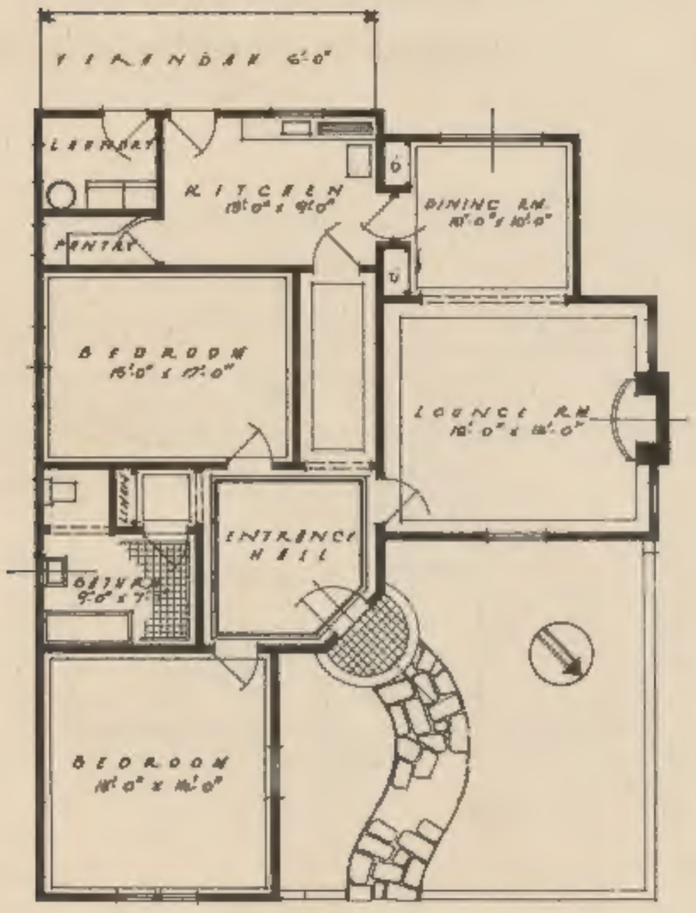

In no other medium can the attractive horizontal effects, now popular in modern domestic architectural design, be obtained as cheaply and as effectively as with Wunderlich Durabestos, the fire-resisting, weather and vermin-proof and durable building sheeting. In addition, if a colourful treatment is preferred, Durabestos can be easily and economically painted. Refer to pages 18 and 19 for instructions relative to the horizontal application of Durabestos, also for painting specifications.

Before arranging to build any of these homes have an Architect prepare complete plans and specifications—then engage a competent Builder.

TAKE ADVANTAGE OF A GOVERNMENT LOAN TO BUILD A DURABESTOS HOME

WUNDERLICH DURABESTOS BUILDING SHEETS

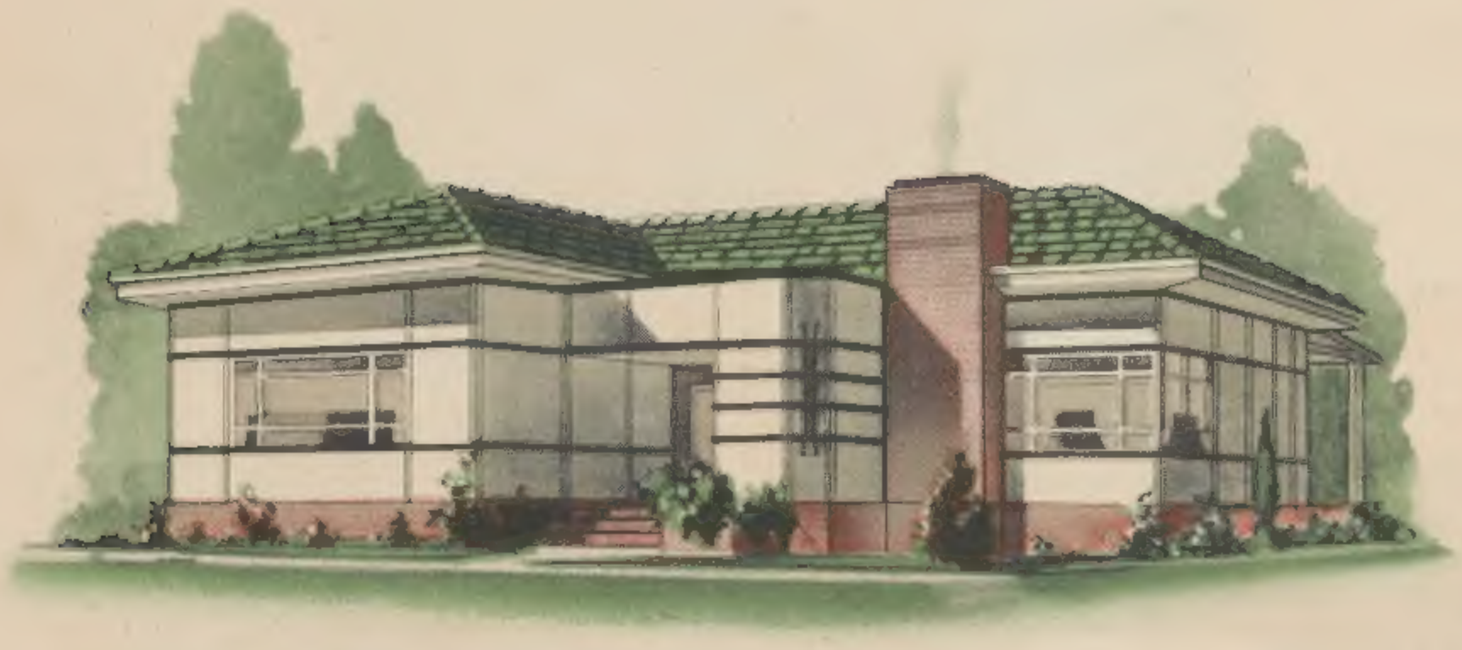

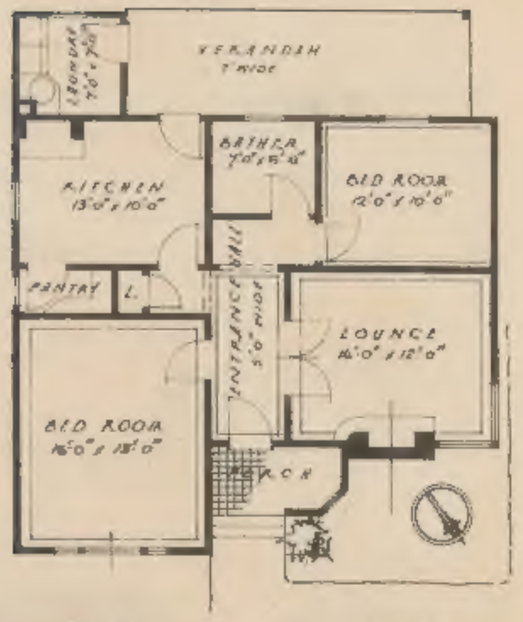

WUNDERLICH DURABESTOS HOME DESIGN,
No. 209.

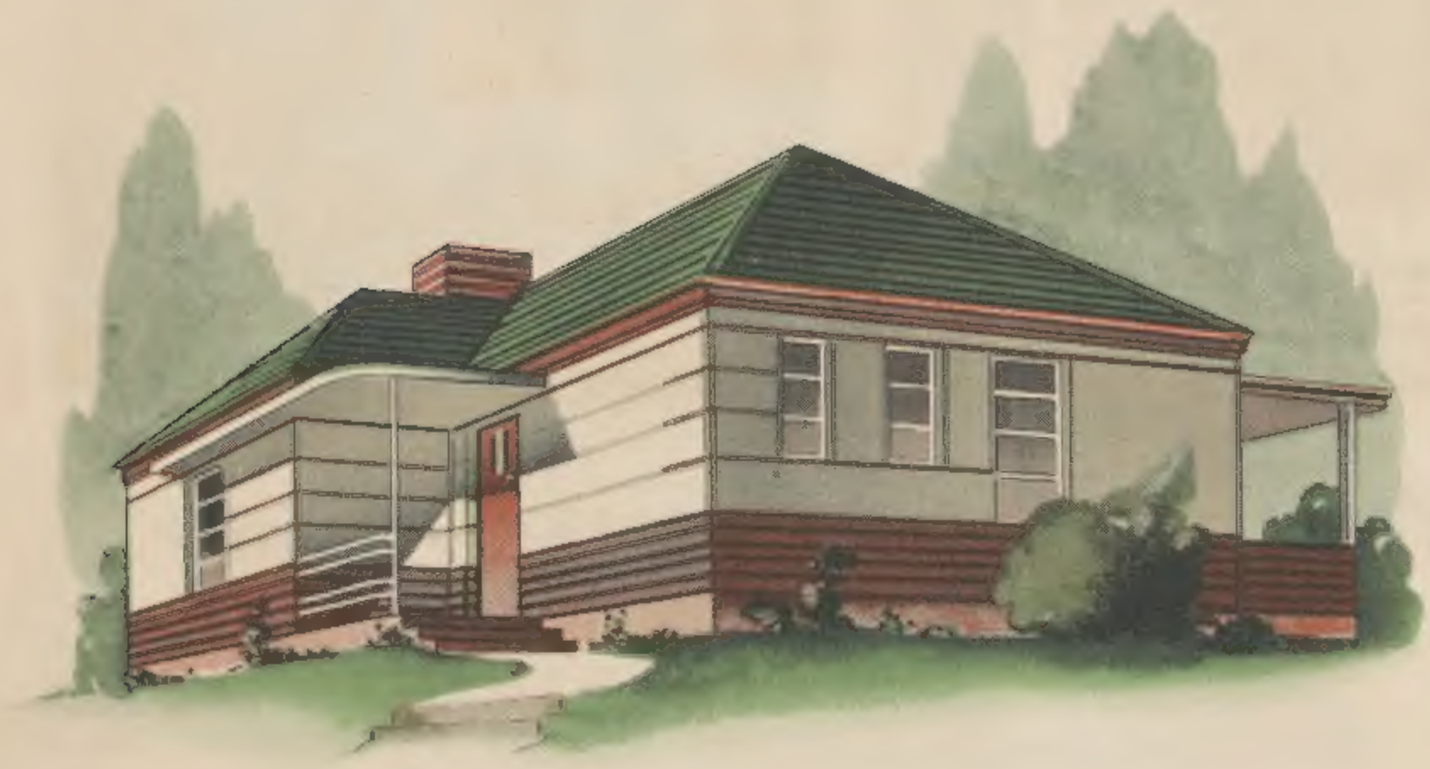

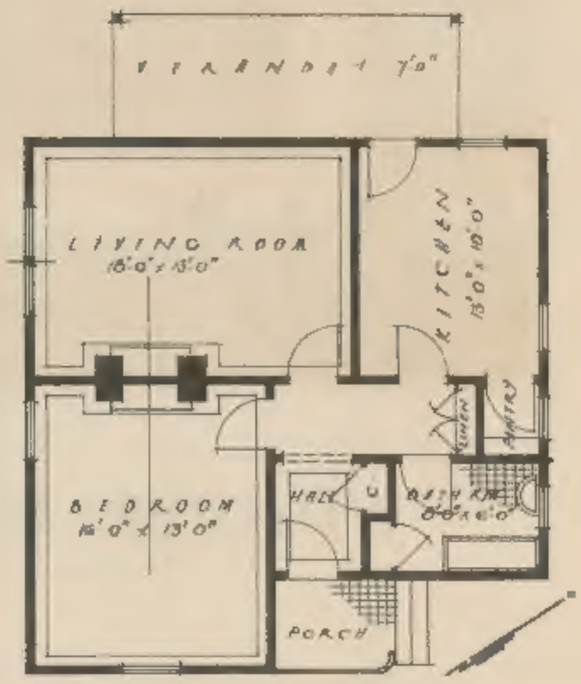

WUNDERLICH DURABESTOS HOME DESIGN,
No. 210.

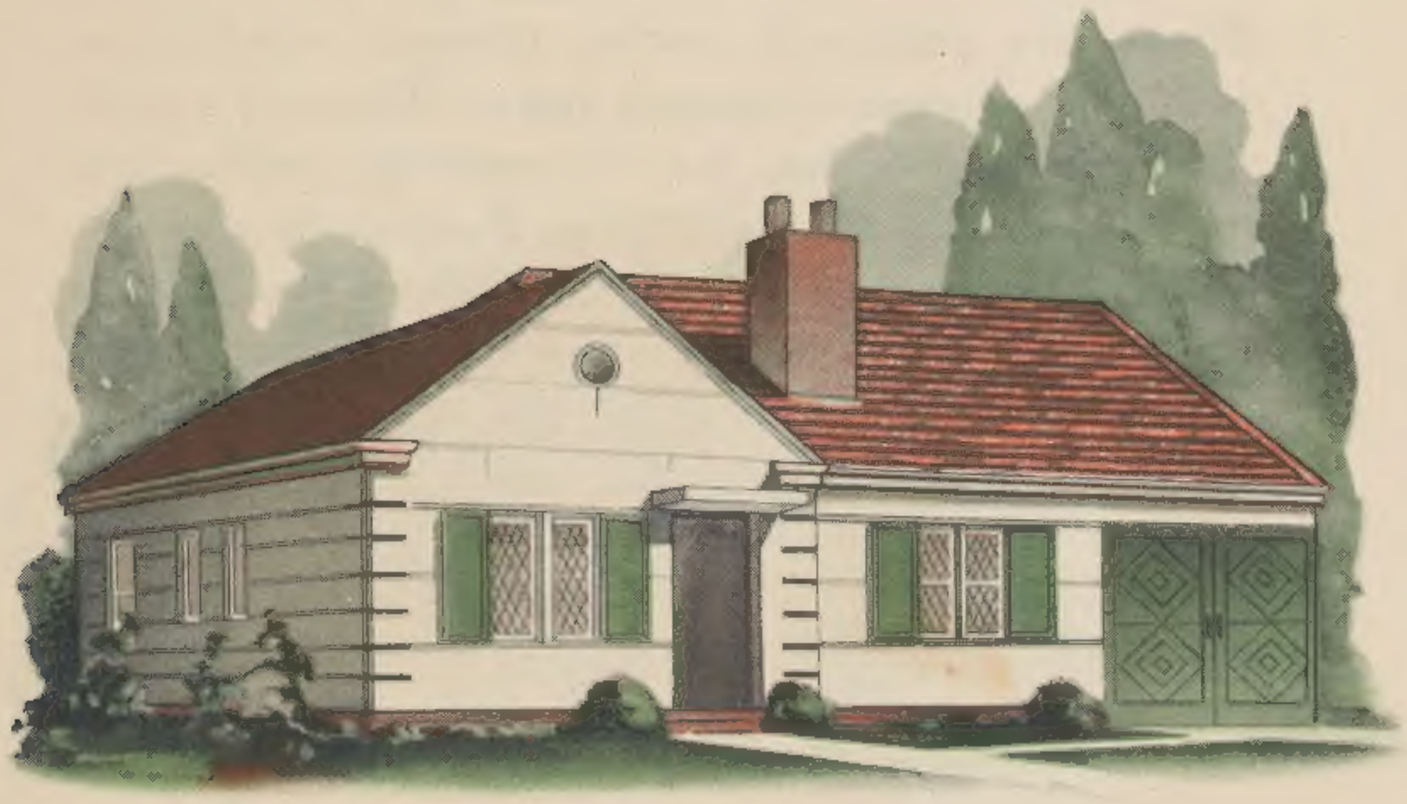

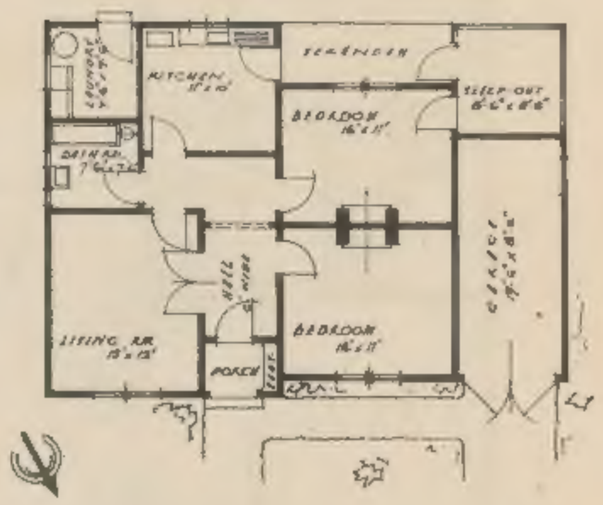

WUNDERLICH DURABESTOS HOME DESIGN,
No. 211.

WUNDERLICH DURABESTOS BUILDING SHEETS

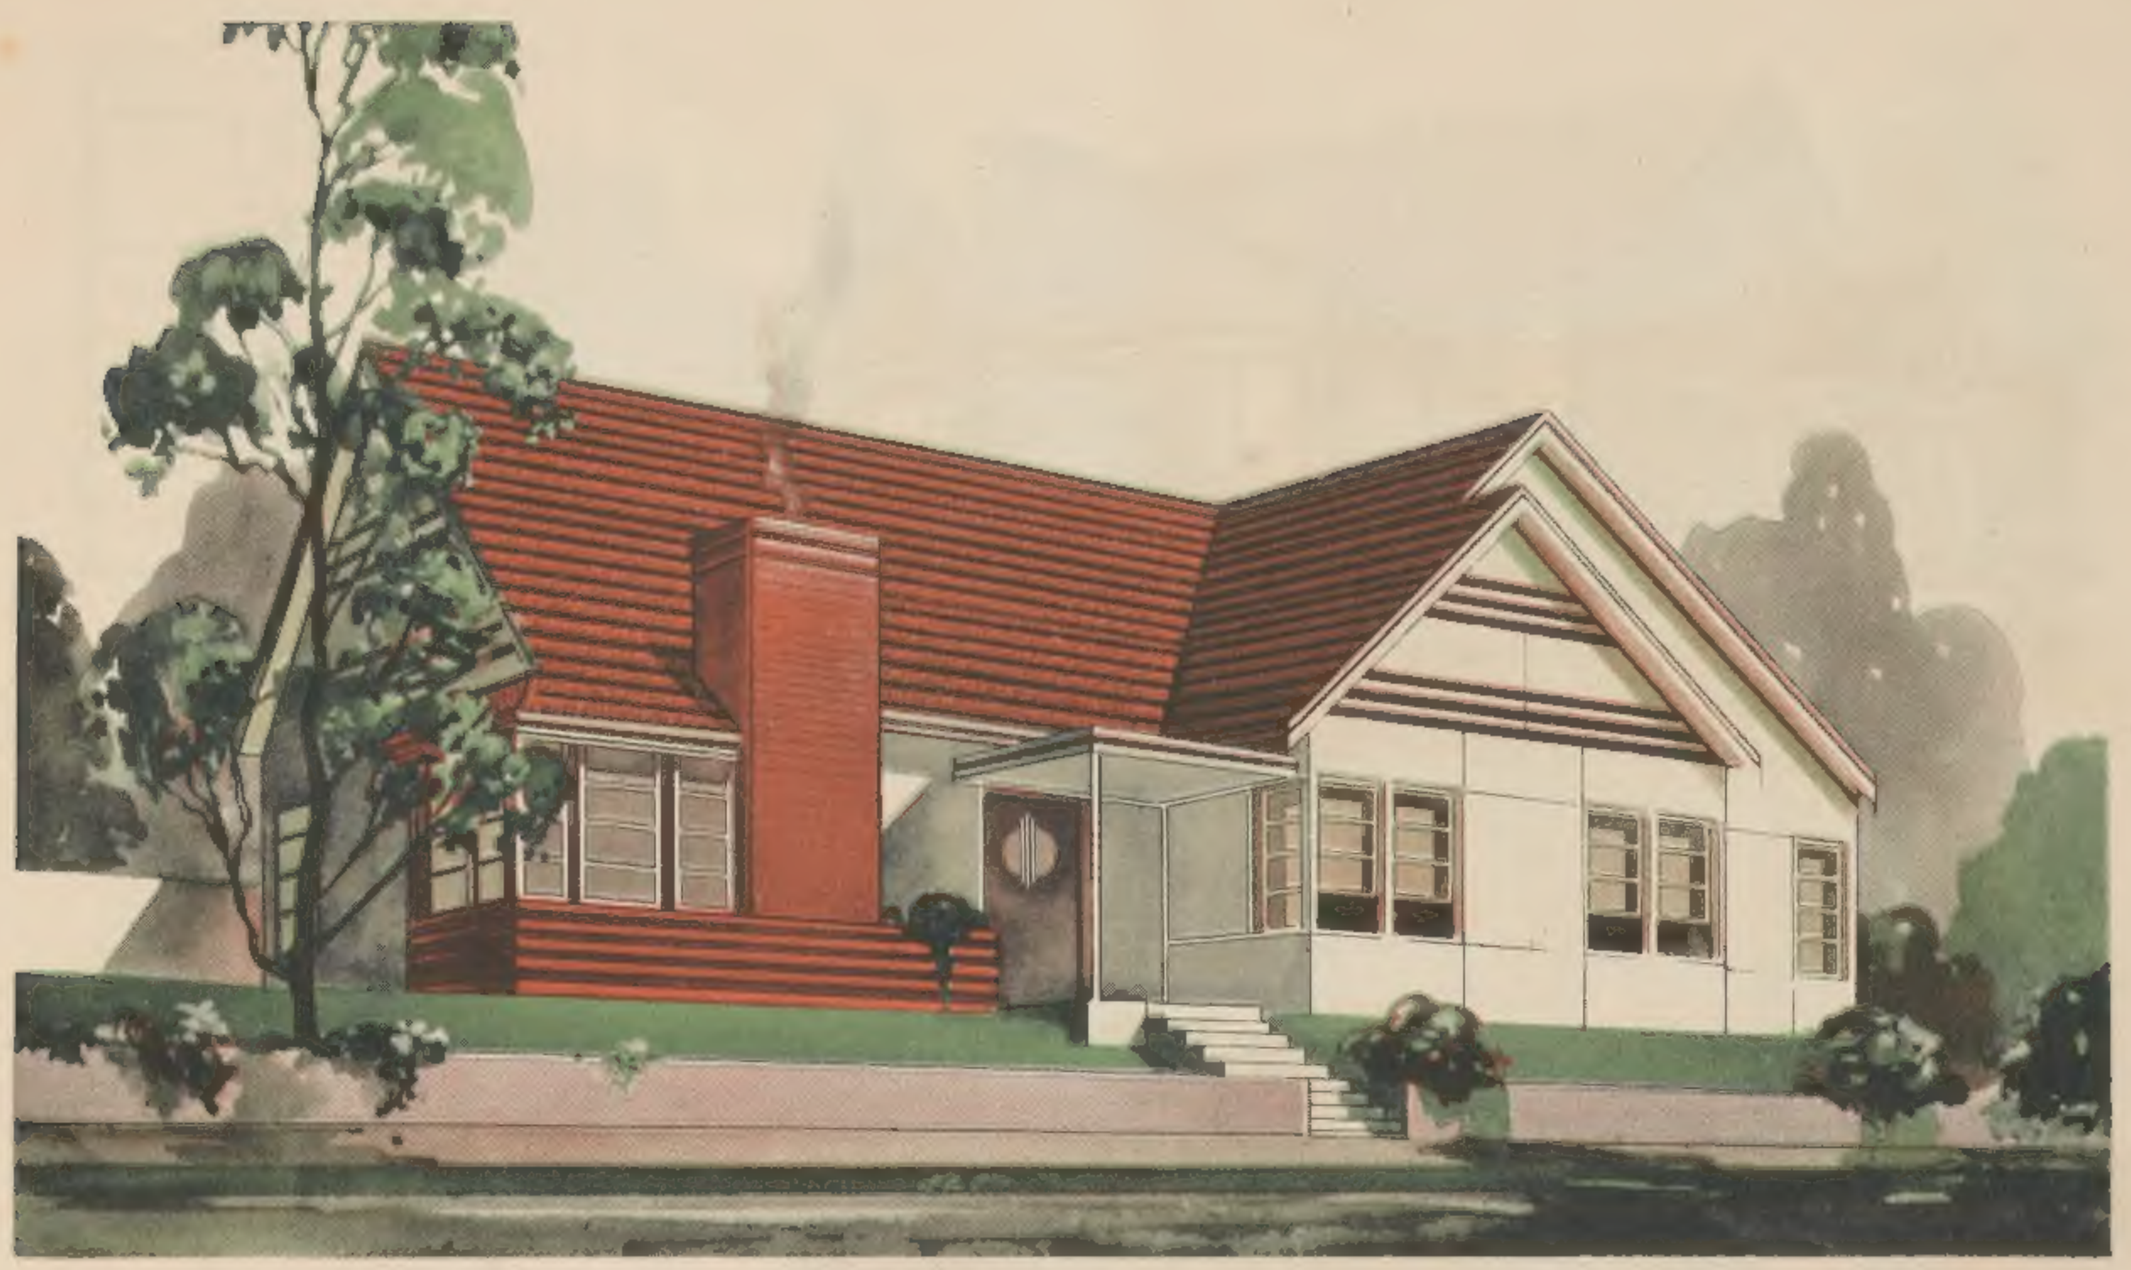

WUNDERLICH DURABESTOS HOME DESIGN No. 212

ROOFED WITH WUNDERLICH TERRA COTTA TILES

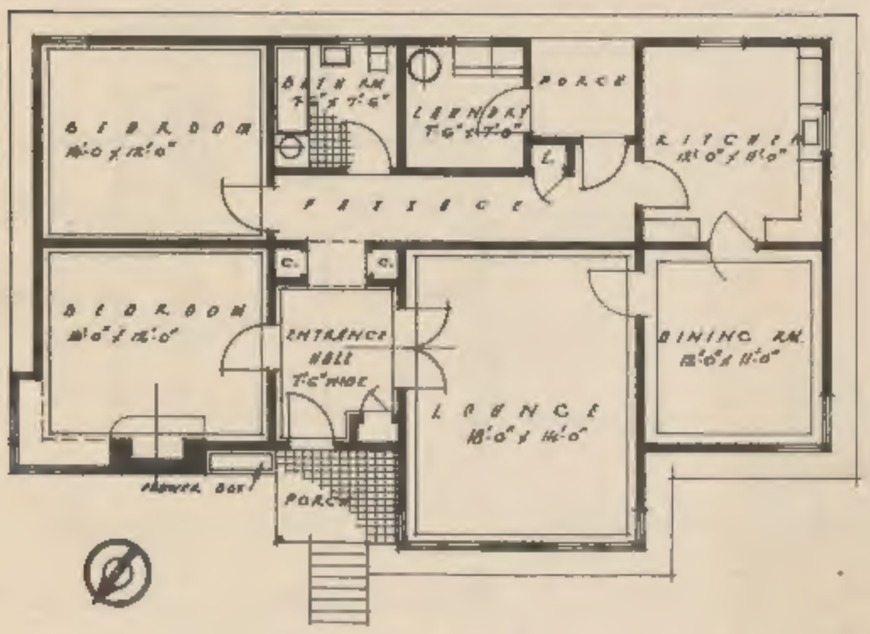

Wunderlich Durabestos Sheets are manufactured in a large range of handy stock sizes. They are comparatively light in weight and inexpensive to transport by rail or steamer; thus, even in remote country districts, they are available at only a small advance on city prices. Recognising their fire-resisting qualities, insurance companies offer low rates when insuring against fire risks houses sheathed with Durabestos Asbestos-Cement Products.

Before arranging to build any of these homes have an Architect prepare complete plans and specifications—then engage a competent Builder.

TAKE ADVANTAGE OF A GOVERNMENT LOAN TO BUILD A DURABESTOS HOME

WUNDERLICH DURABESTOS BUILDING SHEETS

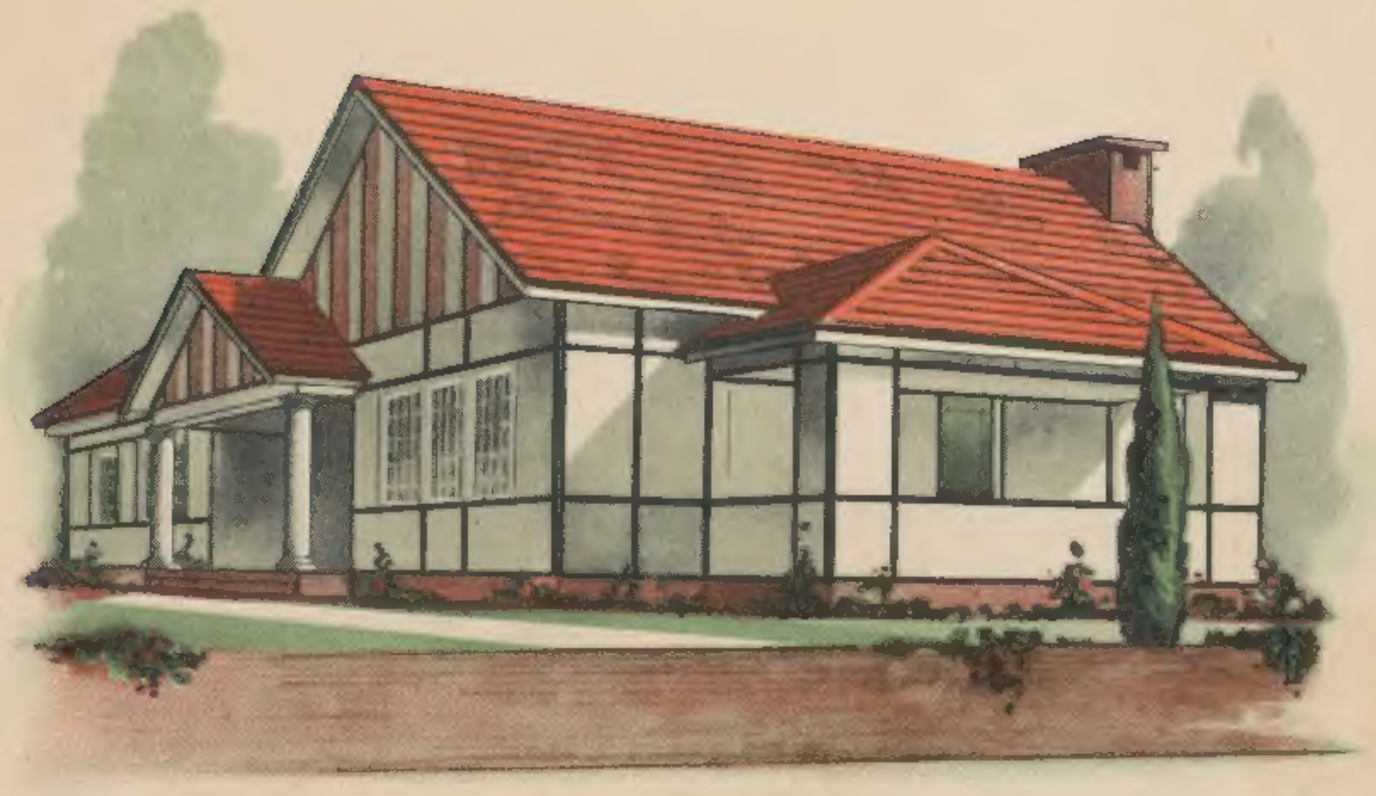

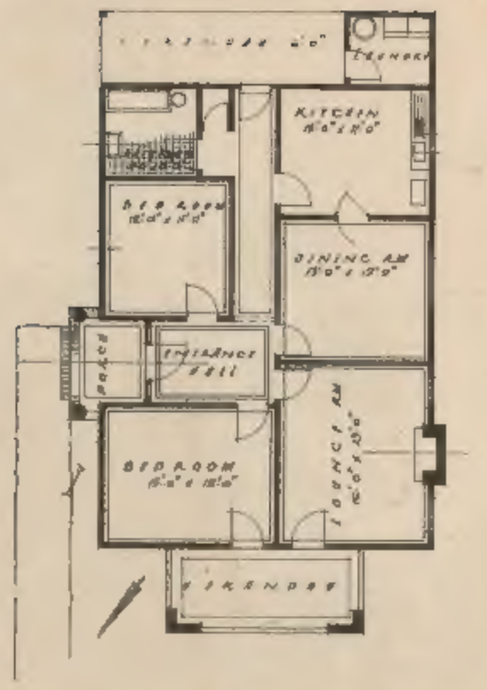

WUNDERLICH DURABESTOS HOME DESIGN,
No. 213.

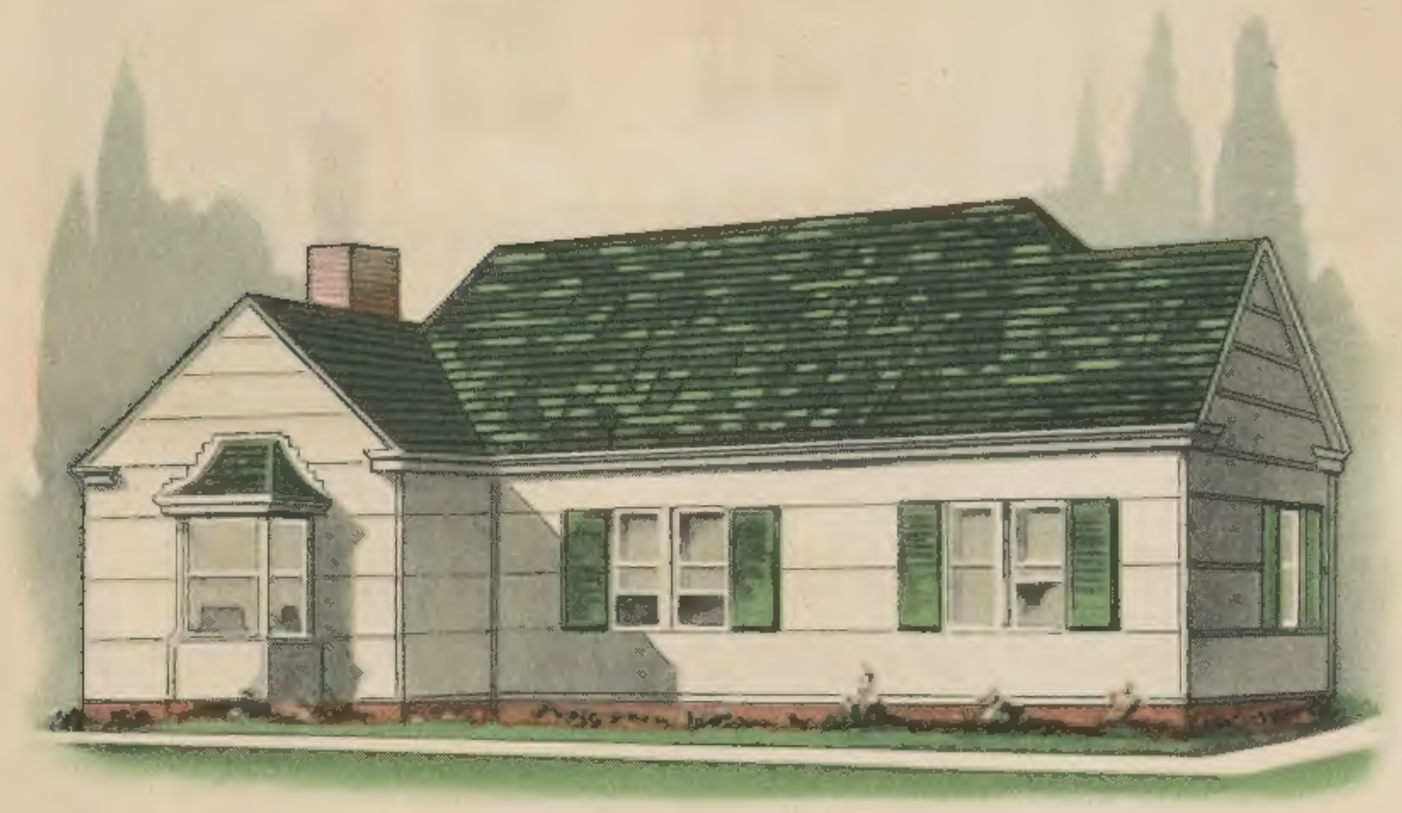

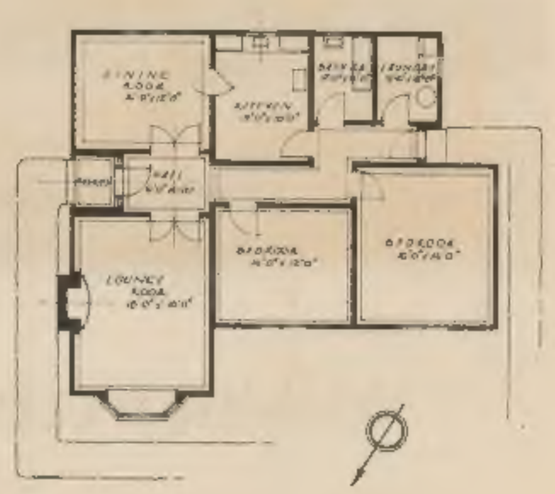

WUNDERLICH DURABESTOS HOME DESIGN,
No. 214.

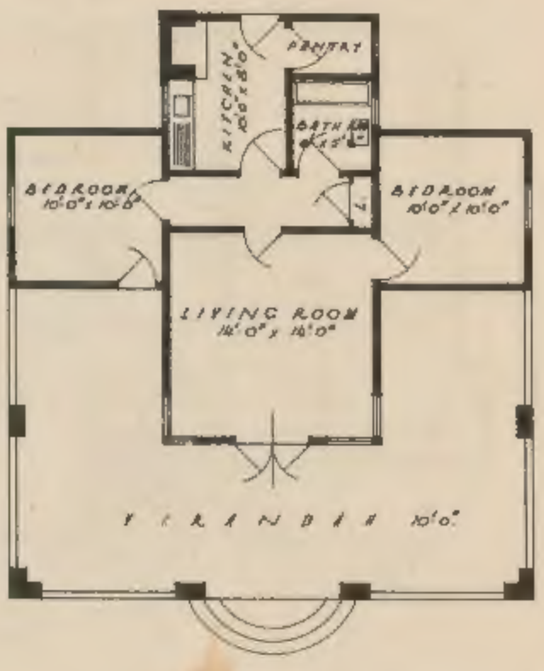

WUNDERLICH DURABESTOS HOME DESIGN
No. 215.

WUNDERLICH DURABESTOS BUILDING SHEETS

WUNDERLICH DURABESTOS HOME DESIGN No. 216

ROOFED WITH WUNDERLICH DEEP CORRUGATED DURABESTOS

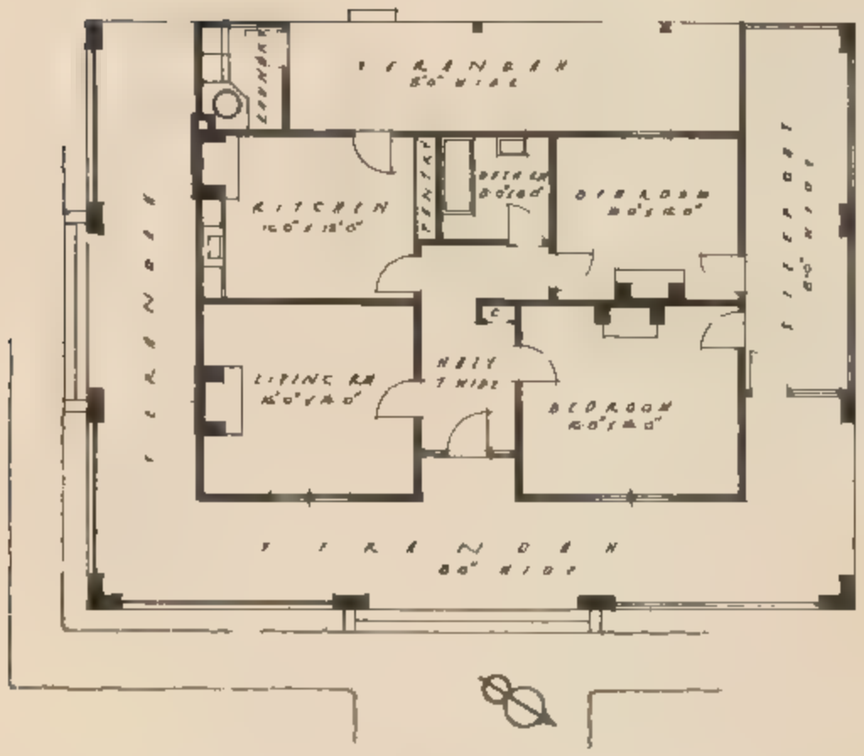

Apart from its use in new construction, Wunderlich Flat Durabestos Sheeting is the most adaptable material for making alterations and adding rooms to existing buildings and for purposes such as enclosing verandahs. Furthermore, this durable Asbestos-Cement sheeting is impervious to the disintegrating effects of salt-laden air, and is therefore recommended for building seaside homes. For roofing this type of home use Deep Corrugated Durabestos Sheets.

Before arranging to build any of these homes have an Architect prepare complete plans and specifications—then engage a competent Builder.

TAKE ADVANTAGE OF A GOVERNMENT LOAN TO BUILD A DURABESTOS HOME

WUNDERLICH DURABESTOS BUILDING SHEETS

WUNDERLICH

INTERIOR WALLS

THE USE OF WUNDERLICH DUR
MOULDINGS, ANGLE MOULDIN
ING MAKES POSSIBLE AN UNLI
MENT OF INTERIOR W

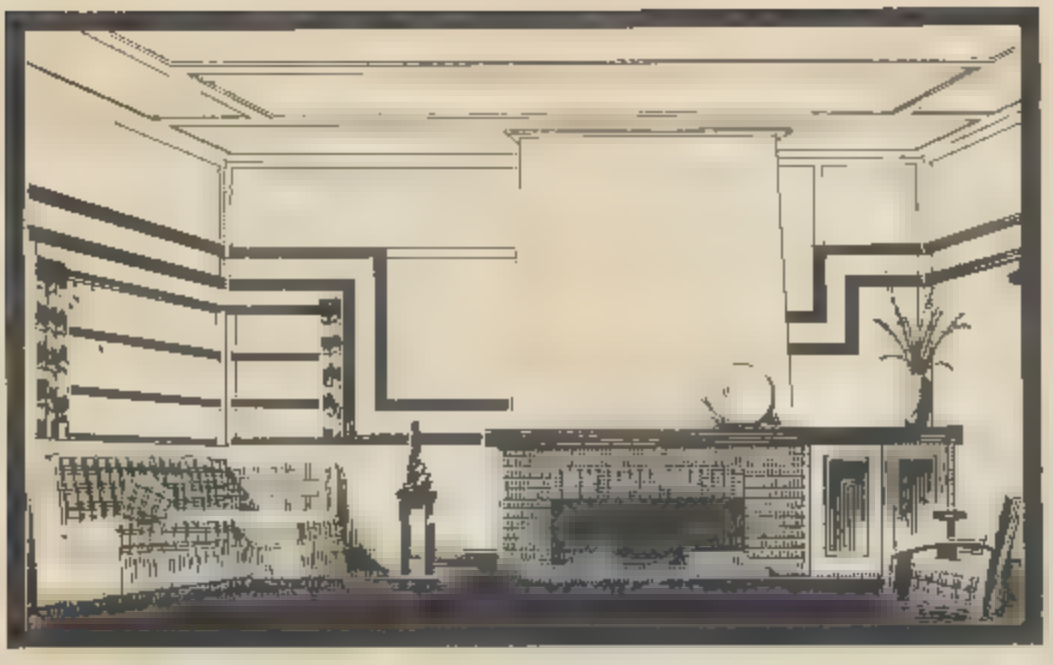

LOUNGE ROOM (Interior) showing the applica-tion of Durabestos Sheets and Accessories to walls and ceiling

DINING ROOM (Interior) showing the use of Durabestos Sheets and Accessories to walls and ceiling

LIVING ROOM (Interior) illustrating a Durabestos treatment to walls and ceilings.

WUNDERLICH DURABESTOS BUILDING SHEETS

DURABESTOS

S AND CEILINGS

ABESTOS FLAT SHEETS, COVER
GS, PICTURE RAIL AND SKIRT-
MITED VARIETY IN THE TREAT-
ALLS AND CEILINGS.

BEDROOM (interior) featuring Durabestos Sheets and Accessories to walls and ceiling.

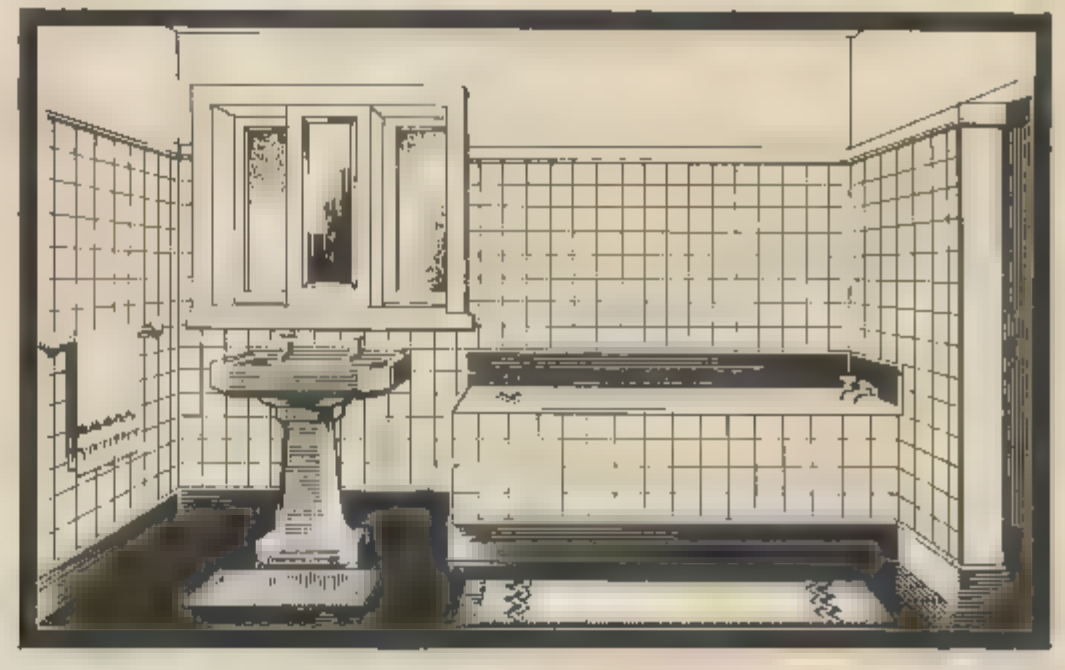

BATHROOM (interior) lined with Duratile Wall Tile Sheeting and Durabestos Flat Sheets.

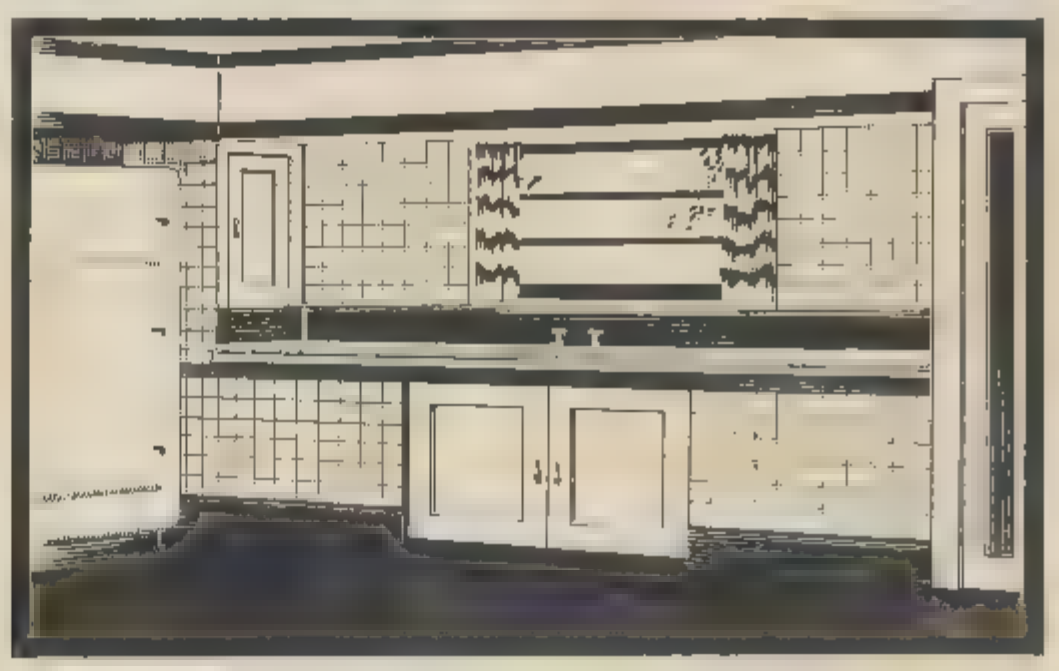

KITCHEN (interior) lined with Duratile Wall Tile Sheeting and Durabestos Flat Sheets

WUNDERLICH DURABESTOS BUILDING SHEETS

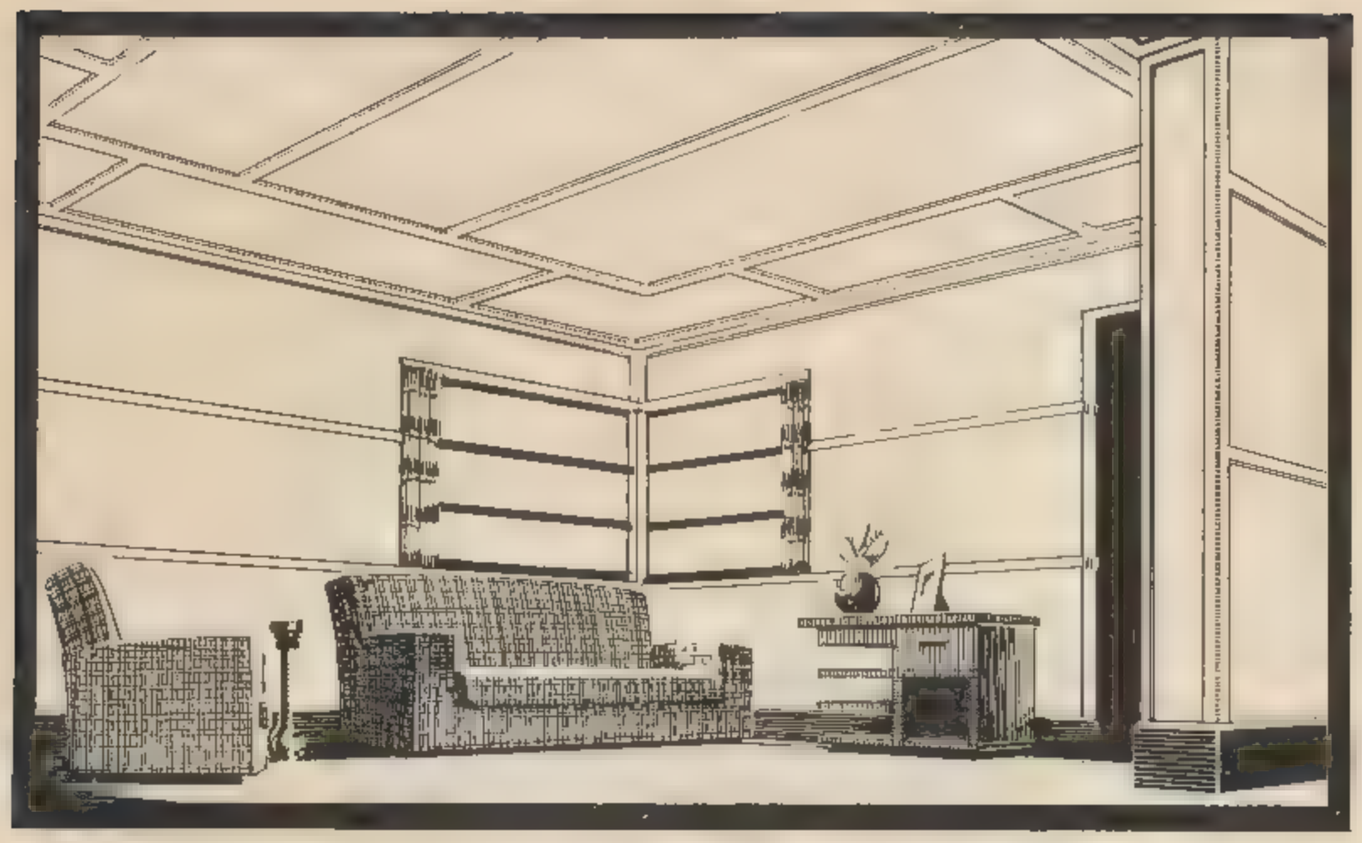

Besides its widespread adoption for exterior walls, interior walls and ceilings, every home or building provides scope for the economical use of Wunderlich Durabestos Flat Sheets and accessories, as awning ceilings, gable fillings, eaves linings, verandah enclosures, pier casing, balcony panels and balustrading.

LOUNGE ROOM (interior) with walls and ceiling lined with Durabestos Sheets.

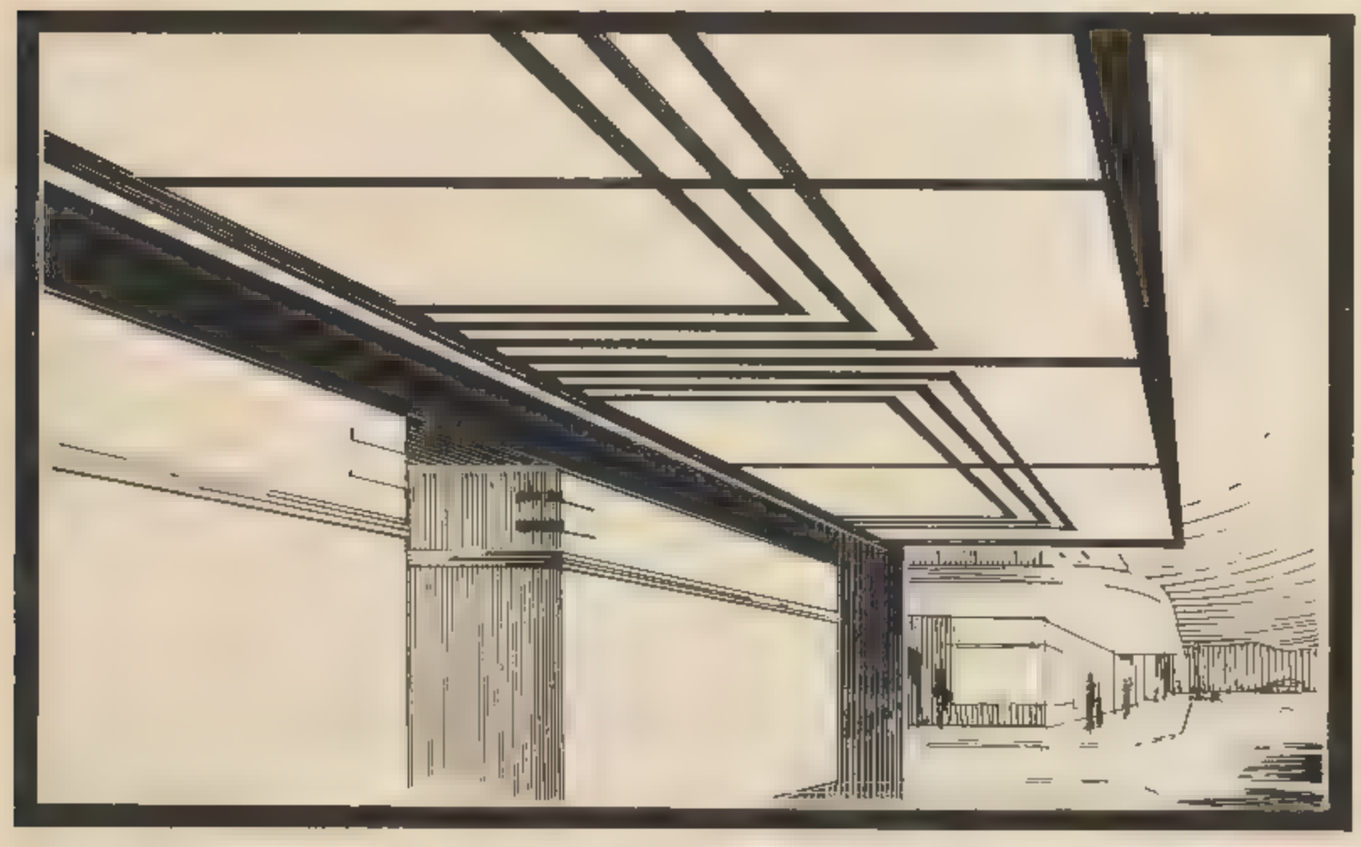

A DURABESTOS AWNING CEILING. Durabestos Cover Mouldings are applied over the joints of the Durabestos Sheets.

A DURABESTOS GABLE TREATMENT. Either Durabestos or Timber Cover Mouldings can be used to cover the joints of the Durabestos Sheets.

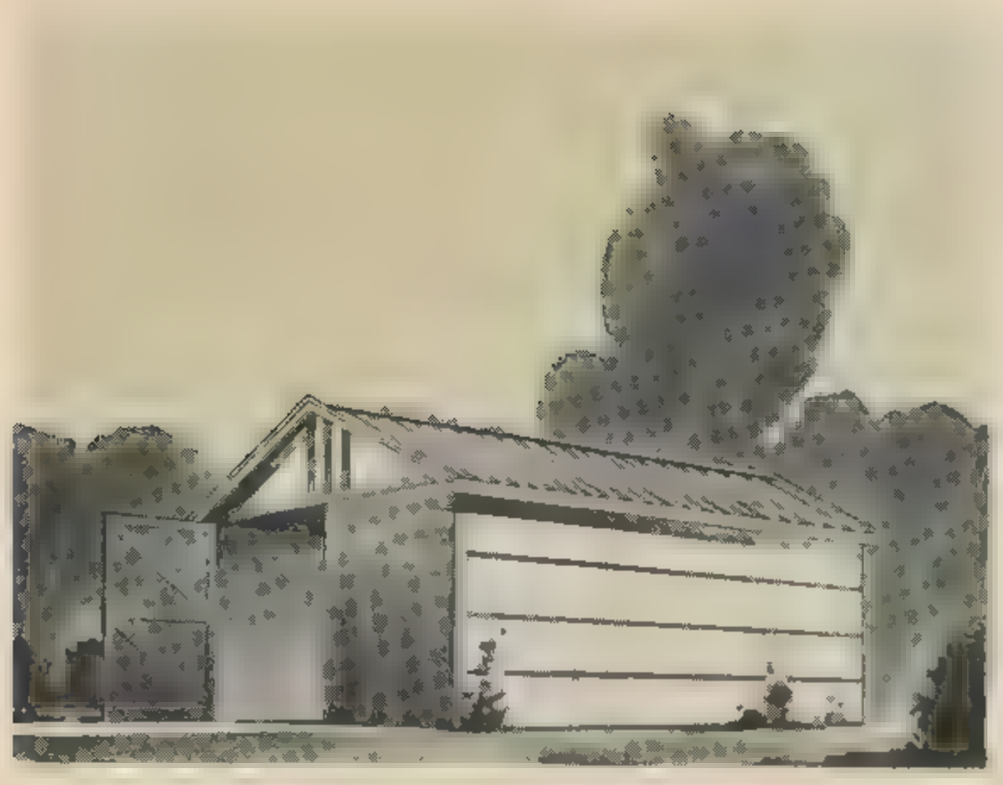

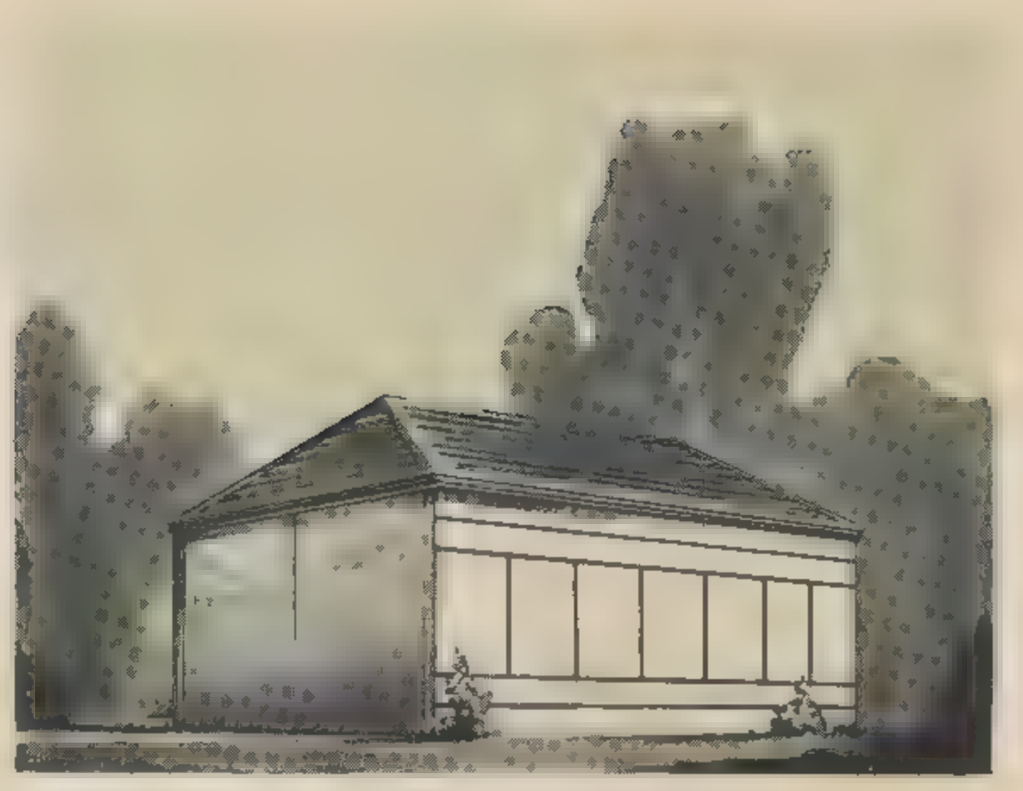

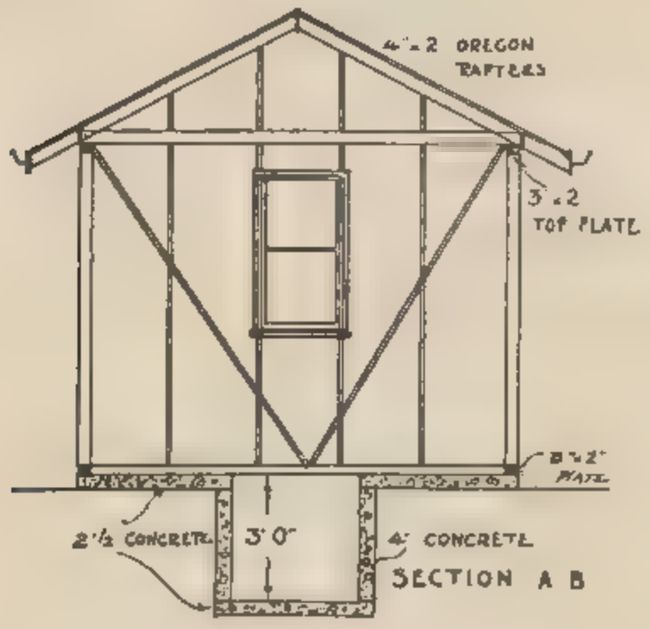

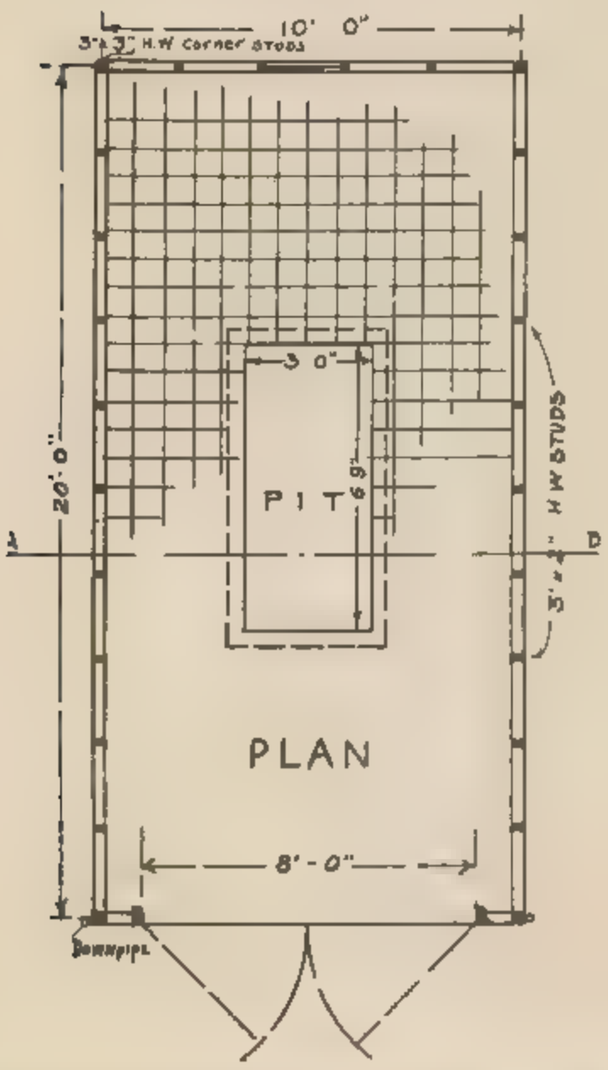

WUNDERLICH DURABESTOS GARAGES

Wunderlich Durabestos will not burn—it minimises the fire risk and is eminently suitable for structures of the garage type.

The interior and exterior walls of both of the garages illustrated are lined with Wunderlich Durabestos. Durabestos Cover Battens and Angles have been applied over the joints of the sheets.

The garage illustrated in the design on the left is roofed with Wunderlich Deep Corrugated Durabestos Sheets, whilst that on the right features Wunderlich Terra Cotta Marseilles Pattern Tiles. The working drawing shown is applicable to both designs.

Either horizontal or vertical fixing of the sheets can be adopted, but in both cases it is advisable to space the studs at 1' 6" or 2' centres to suit stock sized sheets and so obviate the waste the cutting of sheets involves.

A DURABESTOS POULTRY HOUSE.

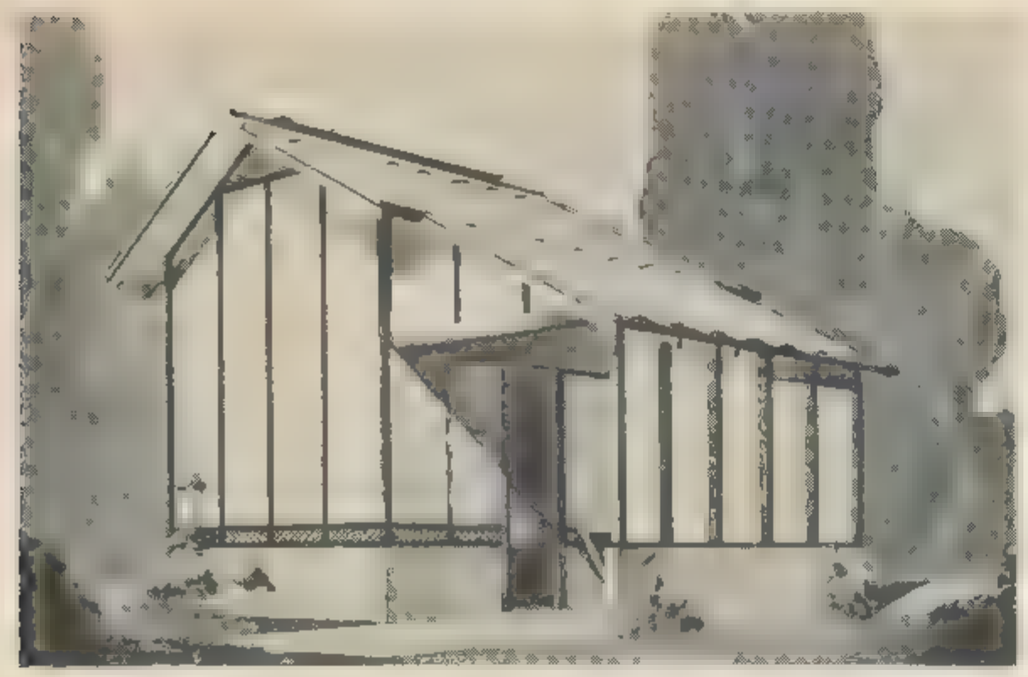

A DURABESTOS DAIRY—SEND FOR FREE PLAN

WUNDERLICH DURABESTOS

FOR FARM BUILDINGS, POULTRY HOUSES, DAIRIES.

Wunderlich Durabestos is a logical choice for constructing all types of farm buildings. Its fire-resisting and vermin-proof qualities make it an indispensable lining to the exterior walls of barns, wool sheds, feed houses, packing sheds, shearers' huts, etc. Poultry farmers find that it is ideal for building better class incubator and brooder houses, for the sheets possess definite insulating value. It is advisable to line both the interior as well as the exterior walls of these buildings with Durabestos. Because of its sanitary qualities it is preferred for erecting laying sheds, intensive houses, etc., for the sheets can be washed down with a hose each day without deterioration. This latter attribute is of particular interest to dairy farmers whose milking sheds and separator houses must always be kept clean and free from vermin.

Durabestos Farm Buildings are inexpensive to construct; they do not require painting or maintenance, and will withstand all climatic conditions. The use of No. 2 (nominal $\frac{3}{16}$") Sheeting is advocated for all farm building walls.

WUNDERLICH DURABESTOS BUILDING SHEETS

WUNDERLICH DURABESTOS Flat Sheets and Accessories

STOCK SIZES, THICKNESSES, WEIGHTS AND CODE WORDS.

WUNDERLICH DURABESTOS FLAT SHEETS.

Wunderlich Durabestos Flat Sheets are made from Asbestos Fibre and Portland Cement. These two components are thoroughly united by mixture and lamination into a dense and rigid product, smoothly surfaced and as hard as concrete. The finished sheet does not deteriorate —it cannot flake, sag, crumble, rot, or corrode.

Durabestos Sheets are made in a wide variety of convenient waste-saving sheets and several thicknesses. Two standard thicknesses are in daily use, viz.:—

$\frac{3}{16}$ ths of an inch—Termed No. 2

$\frac{5}{32}$ nds of an inch—Termed No. 1

No. **2** IS RECOMMENDED FOR EXTERIOR WALLS AND GABLES, WHILST No. **1** IS GENERALLY USED FOR CEILINGS, PARTITIONS AND INTERIOR WALLS.

NOTE: On account of an unavoidable but slight variation during the process of manufacture, these thicknesses are referred to as "nominal" or "approximate."

The Stock Sizes in each "nominal" thickness are as follows:

4' wide by 4, 5, 6, 7, 8, 9 and 10' long.
3' " " " " " " "
2' " " " " " " "
1'6" " " " " " " "

For special purposes, No. 2 thickness is also made in sheets 3' and 4' wide by 11' and 12' long.

THICK SHEETS.

Circumstances, at times, render it desirable to employ Durabestos of greater thickness than standard sheets, so several special thicknesses are made, viz.:—.

$\frac{1}{4}$", $\frac{5}{16}$", $\frac{3}{8}$", $\frac{1}{2}$".

As these thick sheets are used frequently for partitions, they are manufactured with both faces smooth. The $\frac{1}{4}$" thickness is available from stock at short notice, whilst the other thicknesses are supplied in all stock sizes to order.

WEIGHTS: The approximate weights of the various sheets are shown below:—

CODE WORDS: Code words for telegraphing are also shown below. Besides giving the code word, mention must be made of the quantity required in each size.

WUNDERLICH DURABESTOS ACCESSORIES.

Wunderlich Durabestos Cover Mould, Angles, Skirtings, Ventilators, etc., are made from Asbestos Fibre and Portland Cement. They provide a weather, vermin and dust-proof, as well as a fire-resisting, method of covering the joints of Durabestos Sheeting. They ensure simplicity of fixing and low maintenance costs, for, unlike timber battens, they cannot warp, curl, twist, rot or otherwise deteriorate. The edges of the Cover Mould and Angles are rounded, and the Skirting is bevelled, thus preventing the accumulation of dust on the top members of the accessories. See Sections on page 19.

Durabestos accessories are made in the following stock sizes and lengths:—

STOCK SIZES OF DURABESTOS ACCESSORIES:

A.—COVER MOULD (Rounded Edges):
$1\frac{1}{2}$" x $\frac{5}{16}$" 2" x $\frac{5}{16}$" $2\frac{1}{2}$" x $\frac{5}{16}$" 3" x $\frac{5}{16}$"

B.—INTERNAL ANGLE (Rounded Edges):
2" x 2" x $\frac{5}{16}$"

C.—EXTERNAL ANGLES (Rounded Edges):
$1\frac{1}{2}$" x $1\frac{1}{2}$" x $\frac{5}{16}$" 2" x 2" x $\frac{5}{16}$"
$2\frac{1}{2}$" x $2\frac{1}{2}$" x $\frac{5}{16}$" 3" x 3" x $\frac{5}{16}$"

D.—PICTURE RAIL: $2\frac{1}{2}$" x $\frac{5}{16}$"

E.—TOP CAPPING MOULD: 3" x $\frac{5}{16}$"

F.—SKIRTING (Bevelled Edge): 6" x $\frac{1}{2}$"

G.—GALVANISED WEATHER STRIP

H.—HORIZONTAL COVER MOULD: $1\frac{1}{2}$" x $\frac{5}{16}$"
Type (1) for DURABESTOS; Type (2) for WEATHERBOARD and DURABESTOS.

K.—CORNICE: 3" x 3" x $\frac{5}{16}$"

L. –HORIZONTAL COVER MOULD: 2" x $\frac{5}{16}$"

M.—HORIZONTAL COVER MOULD: 2" x $\frac{5}{16}$"

N.—HORIZONTAL WEATHERBOARD MOULD: 2" x $\frac{5}{16}$"

DURABESTOS (Asbestos-Cement) WALL VENTILATORS, Face only and Louvre, available for Interior and Exterior use. Suitable for 9" x 6" openings.

STOCK LENGTHS:

DURABESTOS COVER MOULDS (ALL TYPES), ANGLES, CAPPING MOULDS AND PICTURE RAILS are made in lengths of 4, 5, 6, 7, 8, 9 and 10 feet.

DURABESTOS SKIRTING is made in lengths of 6 feet and 8 feet.

GALVANISED WEATHER STRIP is made in 6 feet lengths only.

No. 2 SHEETS ($\frac{3}{16}$ inch)				No. 1 SHEETS ($\frac{5}{32}$ inch)			
CODE WORD	STOCK WIDTH	STOCK LENGTH	WEIGHT PER SHEET	CODE WORD	STOCK WIDTH	STOCK LENGTH	WEIGHT PER SHEET
Durabac	4ft. wide	10 feet	73 lbs.	Durajus	4ft. wide	10 feet	63 lbs.
Durabed	"	9 "	65 "	Durakal	"	9 "	56 "
Durabif	"	8 "	58 "	Duradok	"	8 "	50 "
Durabog	"	7 "	51 "	Duradum	"	7 "	44 "
Durabuk	"	6 "	44 "	Duradyp	"	6 "	38 "
Durabyn	"	5 "	36 "	Durafag	"	5 "	31 "
Duracad	"	4 "	29 "	Durafej	"	4 "	25 "
Duraciq	3ft. wide	10 feet	54 "	Duraken	3ft. wide	10 "	47 "
Duracoj	"	9 "	49 "	Durakip	"	9 "	42 "
Duracul	"	8 "	44 "	Durafol	"	8 "	38 "
Duracym	"	7 "	38 "	Durafun	"	7 "	33 "
Duradef	"	6 "	33 "	Duragah	"	5 "	28 "
Duradeg	"	5 "	27 "	Duragek	"	4 "	24 "
Duradij	"	4 "	22 "	Duragil	"	6 "	19 "

WUNDERLICH DURABESTOS BUILDING SHEETS

THE METHOD OF FIXING DURABESTOS SHEETS AND ACCESSORIES

HORIZONTAL and VERTICAL Application.

DURABESTOS is easily applied to timber-framed construction by a carpenter using the usual carpenter's tools.

SPACING OF STUDS TO SUIT DURABESTOS.

When planning a home, reference should be made to the list of sizes shown on page 17 of this booklet, as utmost economy will result if the timber framing to walls, ceilings, partitions, etc., is designed to suit stock-sized sheets. Stock-sized sheets are 4', 3', 2' and 1'6" wide, so studs or joists should be spaced at either 2' or 1'6" centres. To ensure a flat surface, timber studs should be of even depth.

SUPPORT BEHIND JOINTS.

There must be support behind all joints. When fixing horizontally it is necessary to let in timber cross (or nogging) pieces between the studs where the joints occur.

CUTTING.

The variety of handy sized sheets available obviates to a great extent the necessity of cutting. However, where cutting is necessary, Durabestos, despite its toughness and rigidity, can be sawn like timber. For this purpose use an old hand saw.

NAILING.

Nail Durabestos with special blunt-point nails, driven at approximately 12" intervals at least $\frac{3}{8}$ of an inch from the edge of the sheet. These special nails are available $1\frac{1}{4}$", 1" and $\frac{3}{4}$" long by 14-gauge in galvanised steel; approximately $\frac{1}{2}$-lb. is required to fix every 100 square feet of Durabestos Sheeting.

JOINTING.

Durabestos Sheets are not lapped—the edges are simply butted closely one against the other. Over this butt joint, screw or nail a Durabestos Cover Mould of the required width. At internal and external angles secure a Durabestos Internal or External Angle Mould.

HORIZONTAL JOINTS.

When Durabestos Cover Moulds Type A, L or M are used, then it is necessary to weatherproof the horizontal joint by the use of the galvanised weather strip G. This weather strip extends from the back and under the upper Durabestos Sheet, and laps down over the lower sheet. Where the Special Durabestos Horizontal Cover or weatherboard Mould H, or the weatherboard Mould N is employed, the galvanised weather strip G is unnecessary, for both of these mouldings are designed for the dual purpose of covering and weather-proofing the joint, the flat member fitting under the upper sheet and the moulded member lapping over the lower sheet or weatherboarding. It is necessary when fixing either H or N types to check out the timber studding to accommodate the flat member of the moulds. Where these horizontal cover moulds intersect at external corners, it is usual to clean mitre them. Screws (of brass preferably) are recommended for

DURABESTOS IS FIXED TO STUDS WITH SPECIAL BLUNT-POINT GALVANISED NAILS.

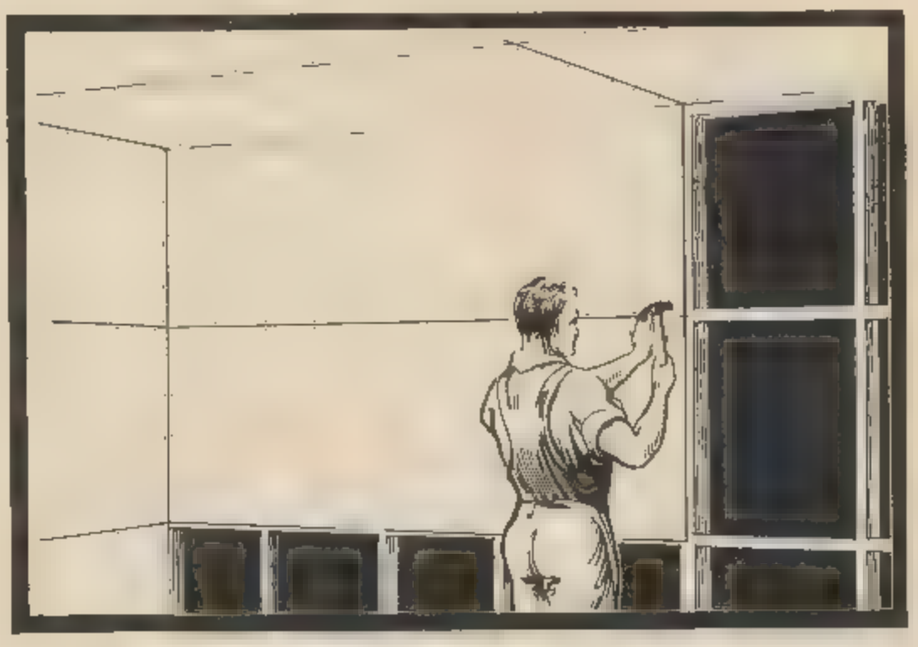

LARGE STOCK SIZES SIMPLIFY THE ERECTION OF DURABESTOS TO WALLS.

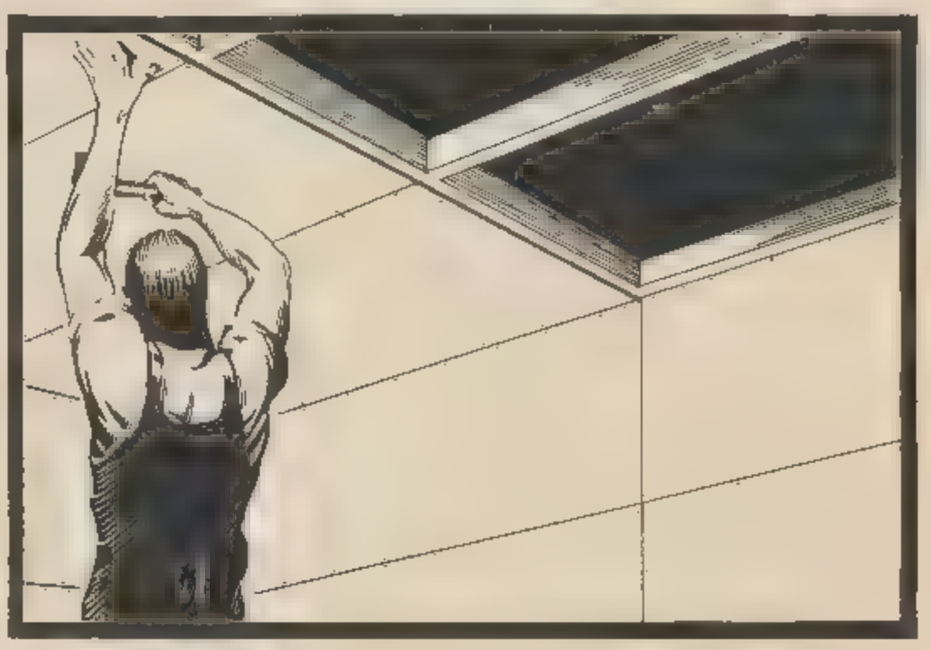

SPACE CEILING JOISTS AND WALL STUDS TO SUIT STOCK SIZED DURABESTOS SHEET.

HOW TO FIX DURABESTOS—Continued.

fixing the Horizontal Cover and Weatherboard Moulds. See details below.

When it is desired to add to the effect of horizontality, as illustrated in many of the designs of homes, apply Durabestos Cover Moulds at intervals between those covering the joints of the sheets. Ample fixing can be obtained by securing these intermediate moulds at each timber stud.

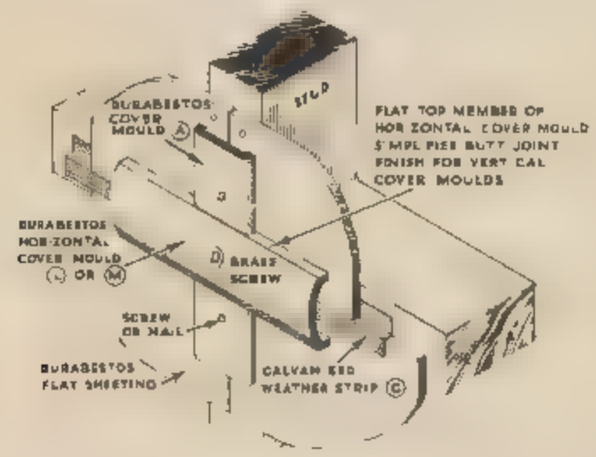
DURABESTOS COVER MOULD
STUD
FLAT TOP MEMBER OF HORIZONTAL COVER MOULD SIMPLE FIER BUTT JOINT FINISH FOR VERTICAL COVER MOULDS
DURABESTOS HORIZONTAL COVER MOULD (L) OR (M)
(D) BRASS SCREW
SCREW OR NAIL
DURABESTOS FLAT SHEETING
GALVAN ED WEATHER STRIP (C)

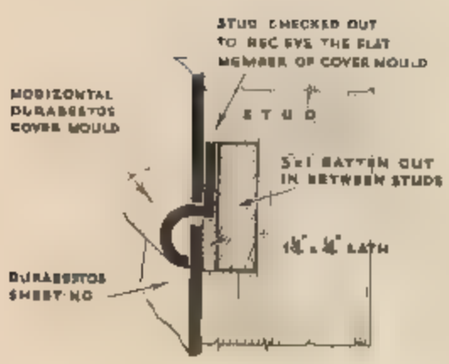
STUD CHECKED OUT TO RECEIVE THE FLAT MEMBER OF COVER MOULD
HORIZONTAL DURABESTOS COVER MOULD
STUD
3x1 BATTEN CUT IN BETWEEN STUDS
1½" x 1" BATH
DURABESTOS SHEETING

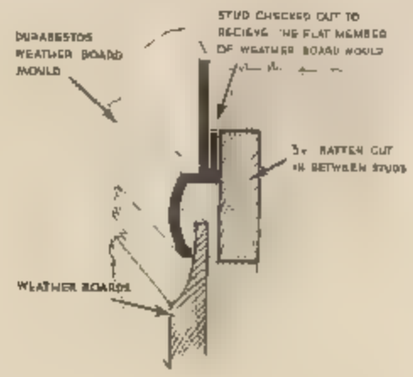
DURABESTOS WEATHER BOARD MOULD
STUD CHECKED OUT TO RECEIVE THE FLAT MEMBER OF WEATHER BOARD MOULD
3x1 BATTEN CUT IN BETWEEN STUDS
WEATHER BOARDS

METHODS OF APPLYING COVER MOULDS DESCRIBED ABOVE.

HOW TO PAINT DURABESTOS

Durabestos possesses a smooth, even, grey-white surface which does not require further decoration. However, where colourful treatment is needed, this can be carried out economically by adhering to the following instructions:

COLD WATER PAINTS.

Cold water paints can be applied direct in the same manner as when painting ordinary cement surfaces. The surface must be thoroughly dry before applying the decorative medium. It is essential that only the best materials be used.

OIL PAINTS, ENAMELS, LACQUERS, Etc.

The decoration of Asbestos Cement with oil paints, etc., presents no more difficulties than are encountered with any comparatively new cement surface. Most well-known paint manufacturers have overcome these difficulties by producing a cement sealing compound which, when applied to the surface of the sheets according to directions, will prevent the action of any free alkali that may be present. It is necessary to apply this sealer as a priming coat, before following on in the usual way with the paint medium. It is again essential that only the best of materials are used and that the surface of the sheet is thoroughly dry before operations are commenced.

Where clients desire to obtain further information relative to painting, the names of leading paint manufacturers will be furnished on request.

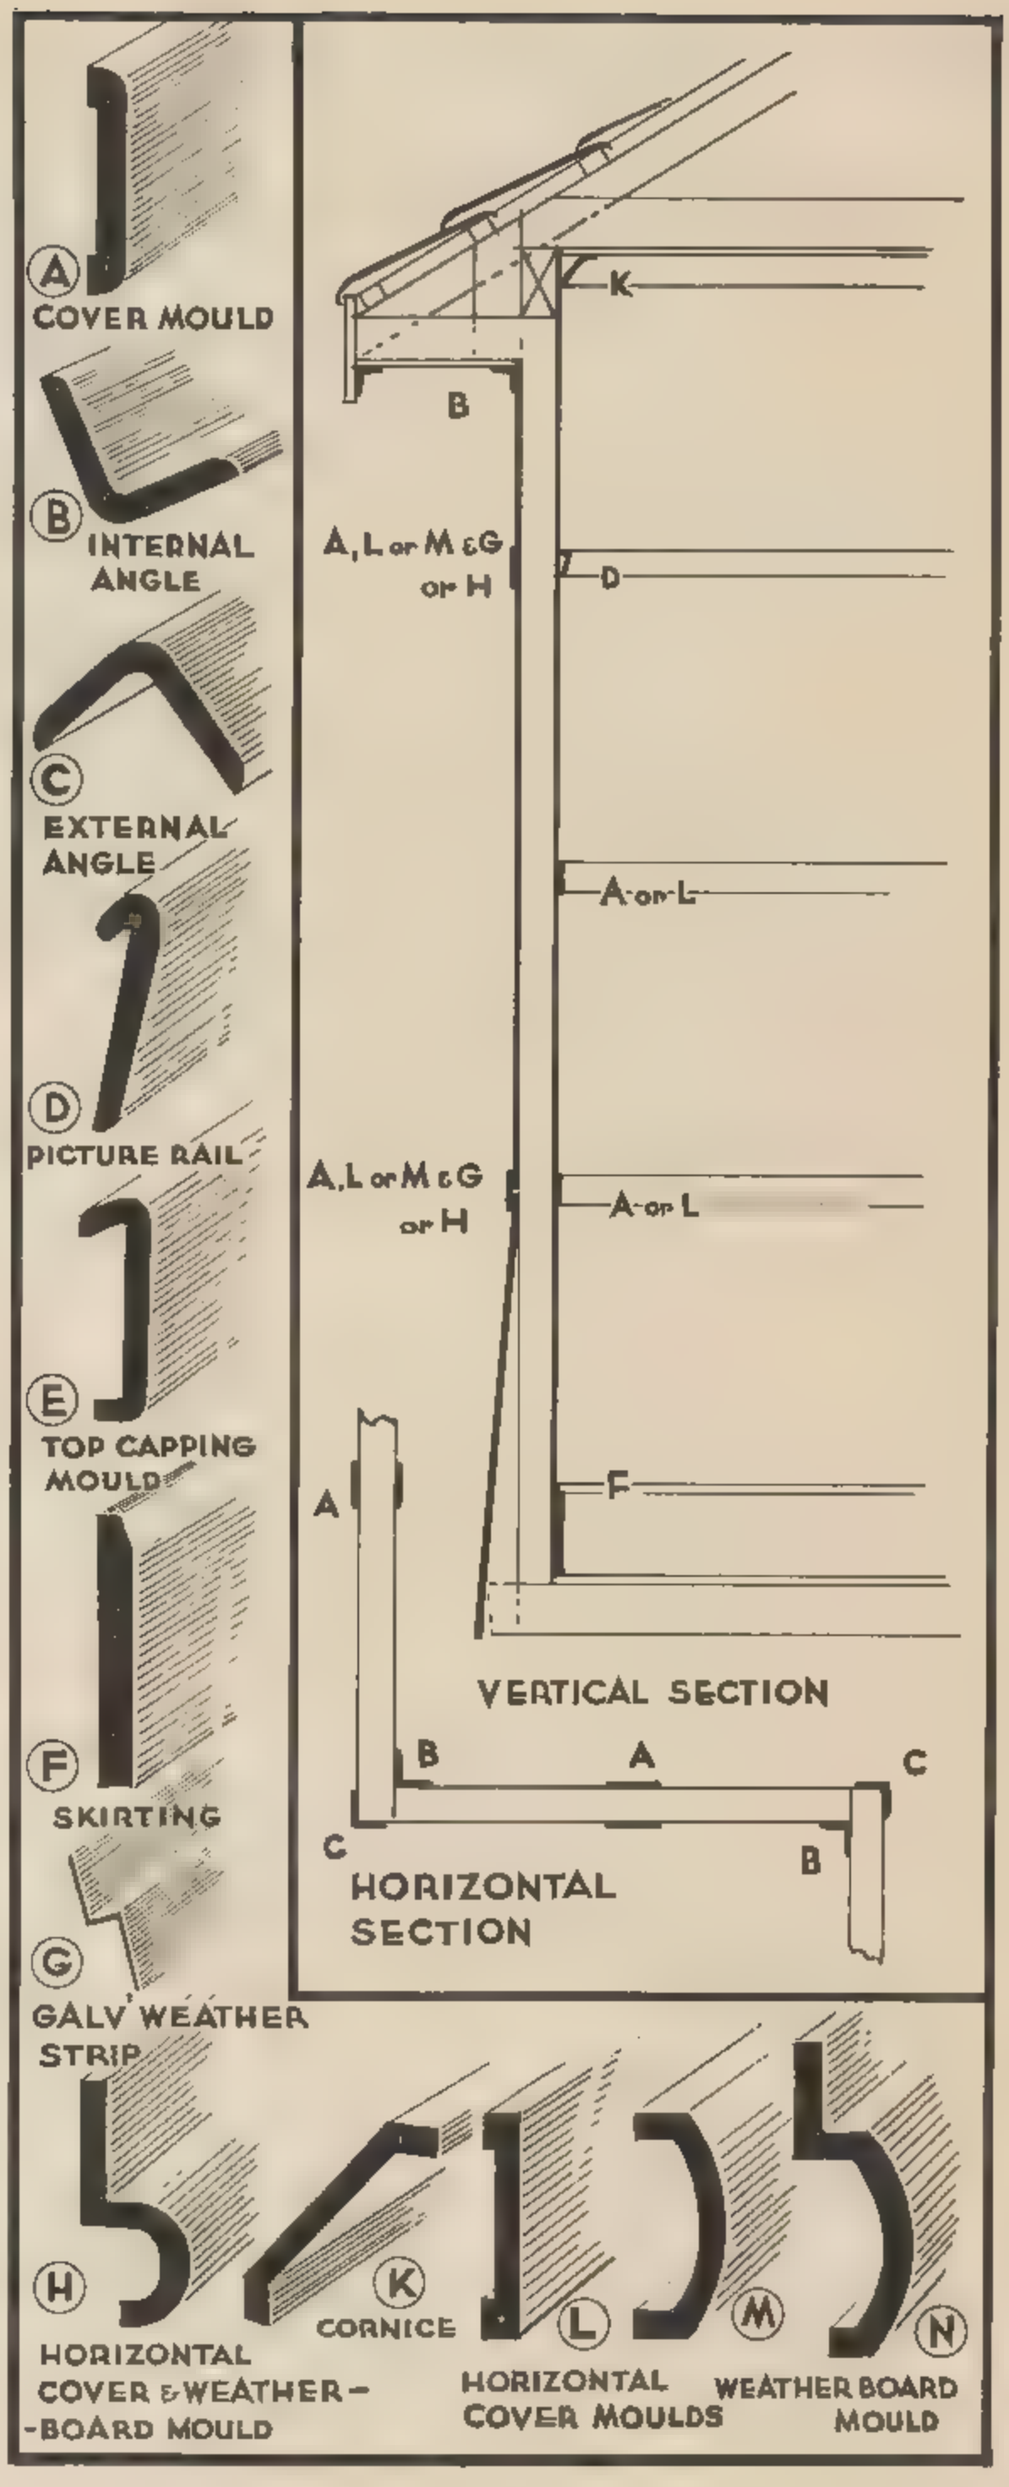

THE ABOVE DRAWING ILLUSTRATES THE USE OF DURABESTOS COVER MOULDINGS AND OTHER ACCESSORIES.

WUNDERLICH DURABESTOS BUILDING SHEETS

WUNDERLICH DURATILE WALL TILE SHEETING

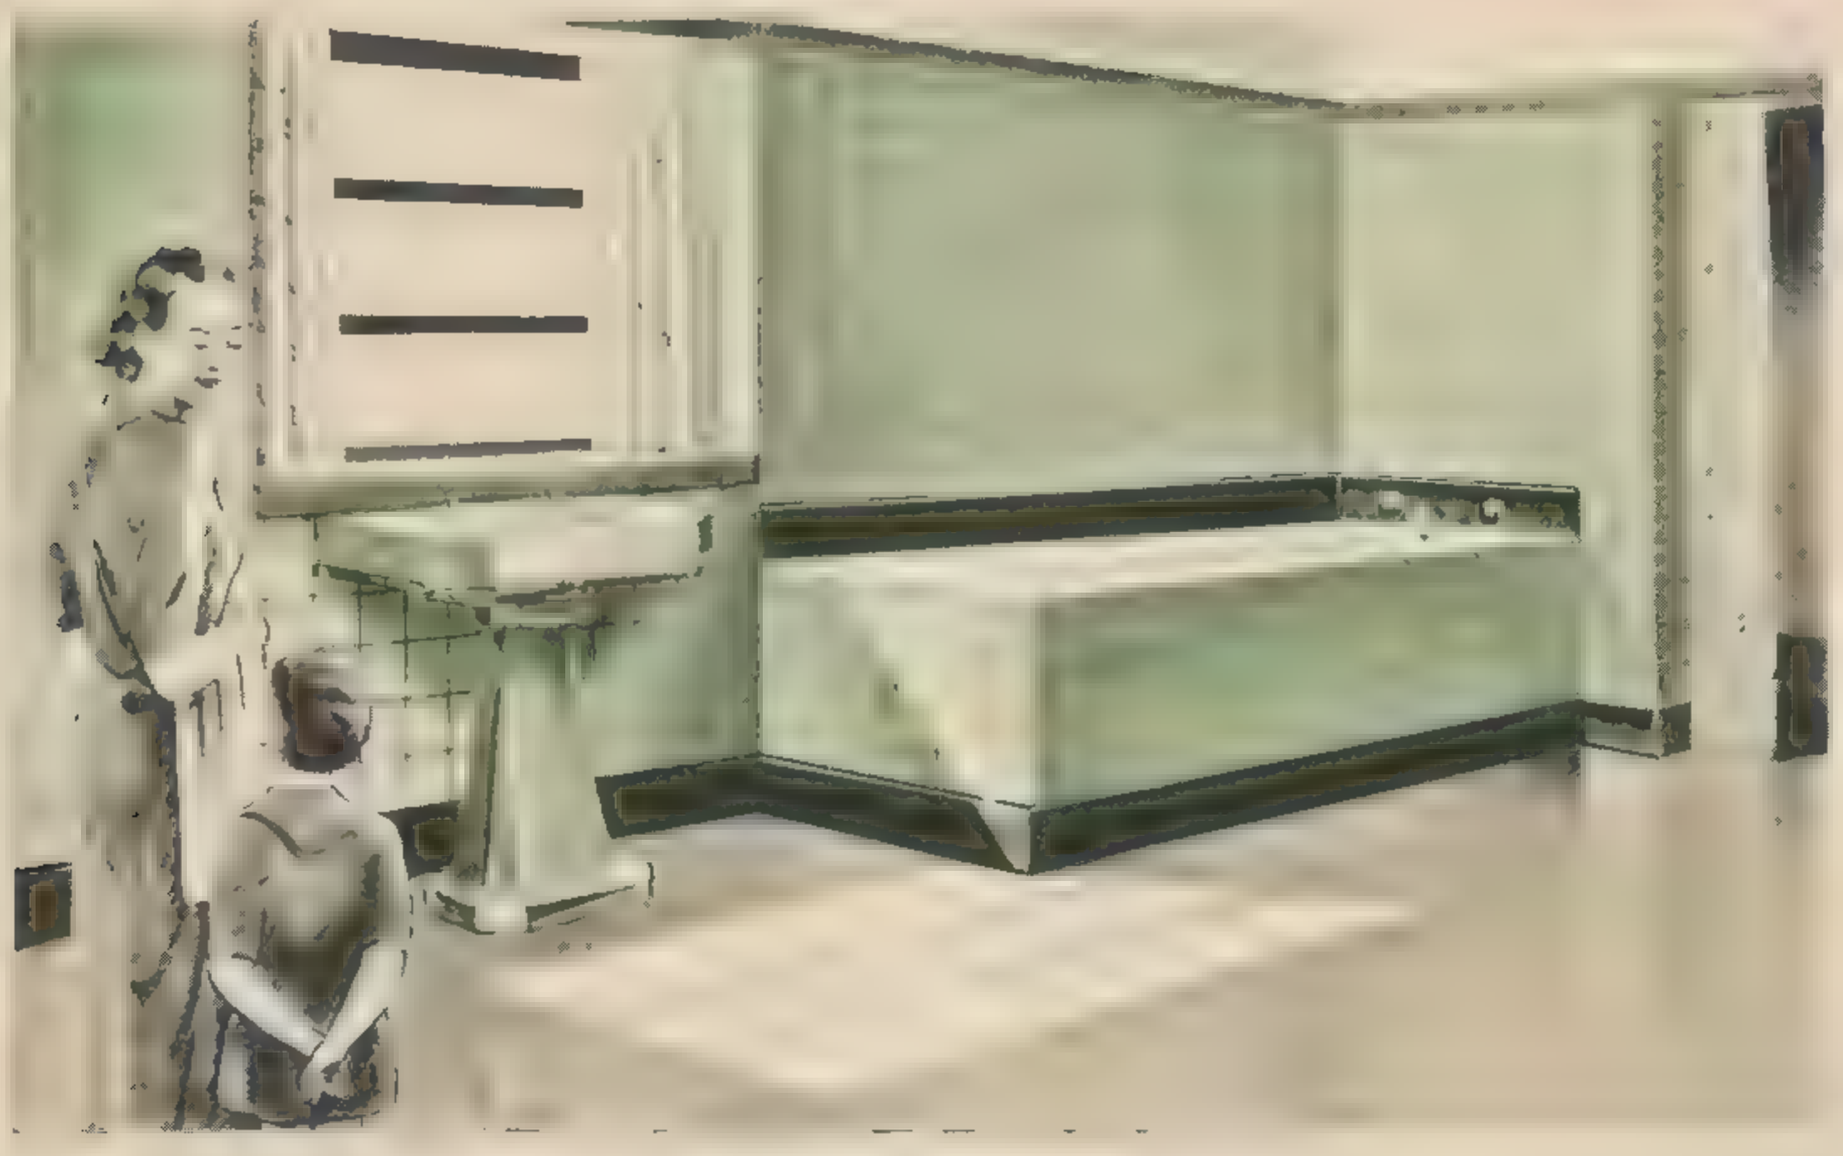

For Lining the Interior Walls of Bathrooms, Kitchens, etc.

Wunderlich Duratile is an Asbestos-Cement Sheeting patterned to represent 4" x 4" Ceramic Wall Tiles. It fulfils the demand for inexpensive tile-like walls, for it has all the attractions of Ceramic Wall Tiles and can be painted or enamelled to suit any decorative scheme.

Duratile Sheets and accessories are available in the following sizes:—

DURATILE SHEETS ($\frac{5}{16}$" thick approx.):
3' and 4' wide by 4, 5, 6, 7 and 8' long.

DURATILE (Asbestos Cement) COVER MOULDS:
2", 2$\frac{1}{2}$" and 3" wide x $\frac{5}{16}$" thick.

INTERNAL AND EXTERNAL ANGLE MOULDS:
2" x 2", 2$\frac{1}{2}$" x 2$\frac{1}{2}$", 3" x 3"—all $\frac{5}{16}$" thick.

TOP-CAPPING MOULD: 3" x $\frac{5}{16}$".
All in lengths of 4, 5, 6, 7, 8, 9 and 10'.

DURATILE SKIRTING:
6" x $\frac{1}{2}$" with bevelled edges, in lengths of 6' and 8'.

METAL (Unpolished Brass or Polished Staybrite Steel):
JOINT STRIP No. 1686, EXTERNAL ANGLE No. 1687, INTERNAL ANGLE No. 1688, in lengths of 4, 5, 6, 7, 8, 9 and 10'.

FIXING.

Duratile is readily installed. It is furnished in waste-saving sizes to suit the dimensions of every wall. Should irregular or odd sizes be required, the sheets can be sawn, or severed along the score marks by holding firmly on a flat bench with the surplus projecting; steady arm pressure along this surplus will fracture the sheet.

Duratile is nailed or secured with nickel-plated countersunk round head screws direct to wall studs or timber frame work. Concrete brick or stone walls should first be plugged and battened. Space the battens to suit the sizes of the sheets. A batten must always be placed behind the joint of two sheets and running in the direction of the joint. At internal and external angles secure a batten vertically at each side of the angle. It is important that they be fixed true and level.

DURATILE may be fixed:—

1. Using metal joint, internal and external angle strips.
2. Using Duratile (Asbestos Cement) Cover Moulds and internal and external angle pieces, etc.
3. With butt joints.

Always commence fixing from the corner of a room, being careful that the first sheet is fixed plumb. If metal joints, strips, etc., are used, as in Method (1), fix internal angles No. 1688 of the desired length to internal corners by nailing through both flanges on to the timber backing. If the room is over 8' long and two or more sheets of DURATILE are necessary to cover the area, where the sheets meet vertically, fix a metal joint strip No. 1686 by nailing through both flanges. Then slide the sheet into position. Cover horizontal joints (if any) with Metal Joint Strip No. 1686 nailed through the top flange only.

For finishing at external corners a Metal External Angle No. 1687 is provided; this is secured by nailing through both flanges prior to sliding the sheets into position.

WUNDERLICH DURATILE WALL TILE SHEETING

If DURATILE (Asbestos Cement) Cover Moulds are used (Method 2), then the sheets are nailed to the timber-frame work and Cover Moulds, Internal and External Angle Pieces of the selected width and length are secured over the joints and to the respective corners. Secure at 18" Centres with nickel-plated screws.

In method (3) (Butt Joints), where sheets meet at right (internal) angles, the edge of one sheet is butted against the face of the other. Flush wall joints are made by butting the edges of the sheets. If an external angle occurs it is advisable to finish with an external angle mould. Stop all flush joints with white lead.

FINISH AT FLOOR LINE AND DADO.

Finish at the floor line with Duratile 6" x ½" bevelled skirting and at dado with Duratile Top-capping Mould secured with nickel screws at 18" centres.

FIXING OF LARGE-SIZED SHEETS.

Where large-sized sheets are used, secure the body of the sheet at 18" centres with nickel-plated countersunk round-headed screws or brads through the score marks—not the plain surface of the sheet.

IMPORTANT: Where Duratile is fixed behind baths, basins, sinks, draining boards, etc., where moisture is likely to be constantly present, seal the bottom edge by setting in a plastic compound such as "Vulcatex." Force the edge down into the compound so that some of the mixture is squeezed behind the sheet.

PAINTING DURATILE.

The following specification is recommended as providing generally the best and most lasting finish on "DURATILE." The surface of the sheeting has already been treated with a cement sealer. It is essential that the sheets be thoroughly dry before painting is commenced.

1. Apply one or two coats of flat undercoating.
2. Lightly rub down and finish with one coat of enamel.

The materials used for the various coatings must be of a recognised brand.

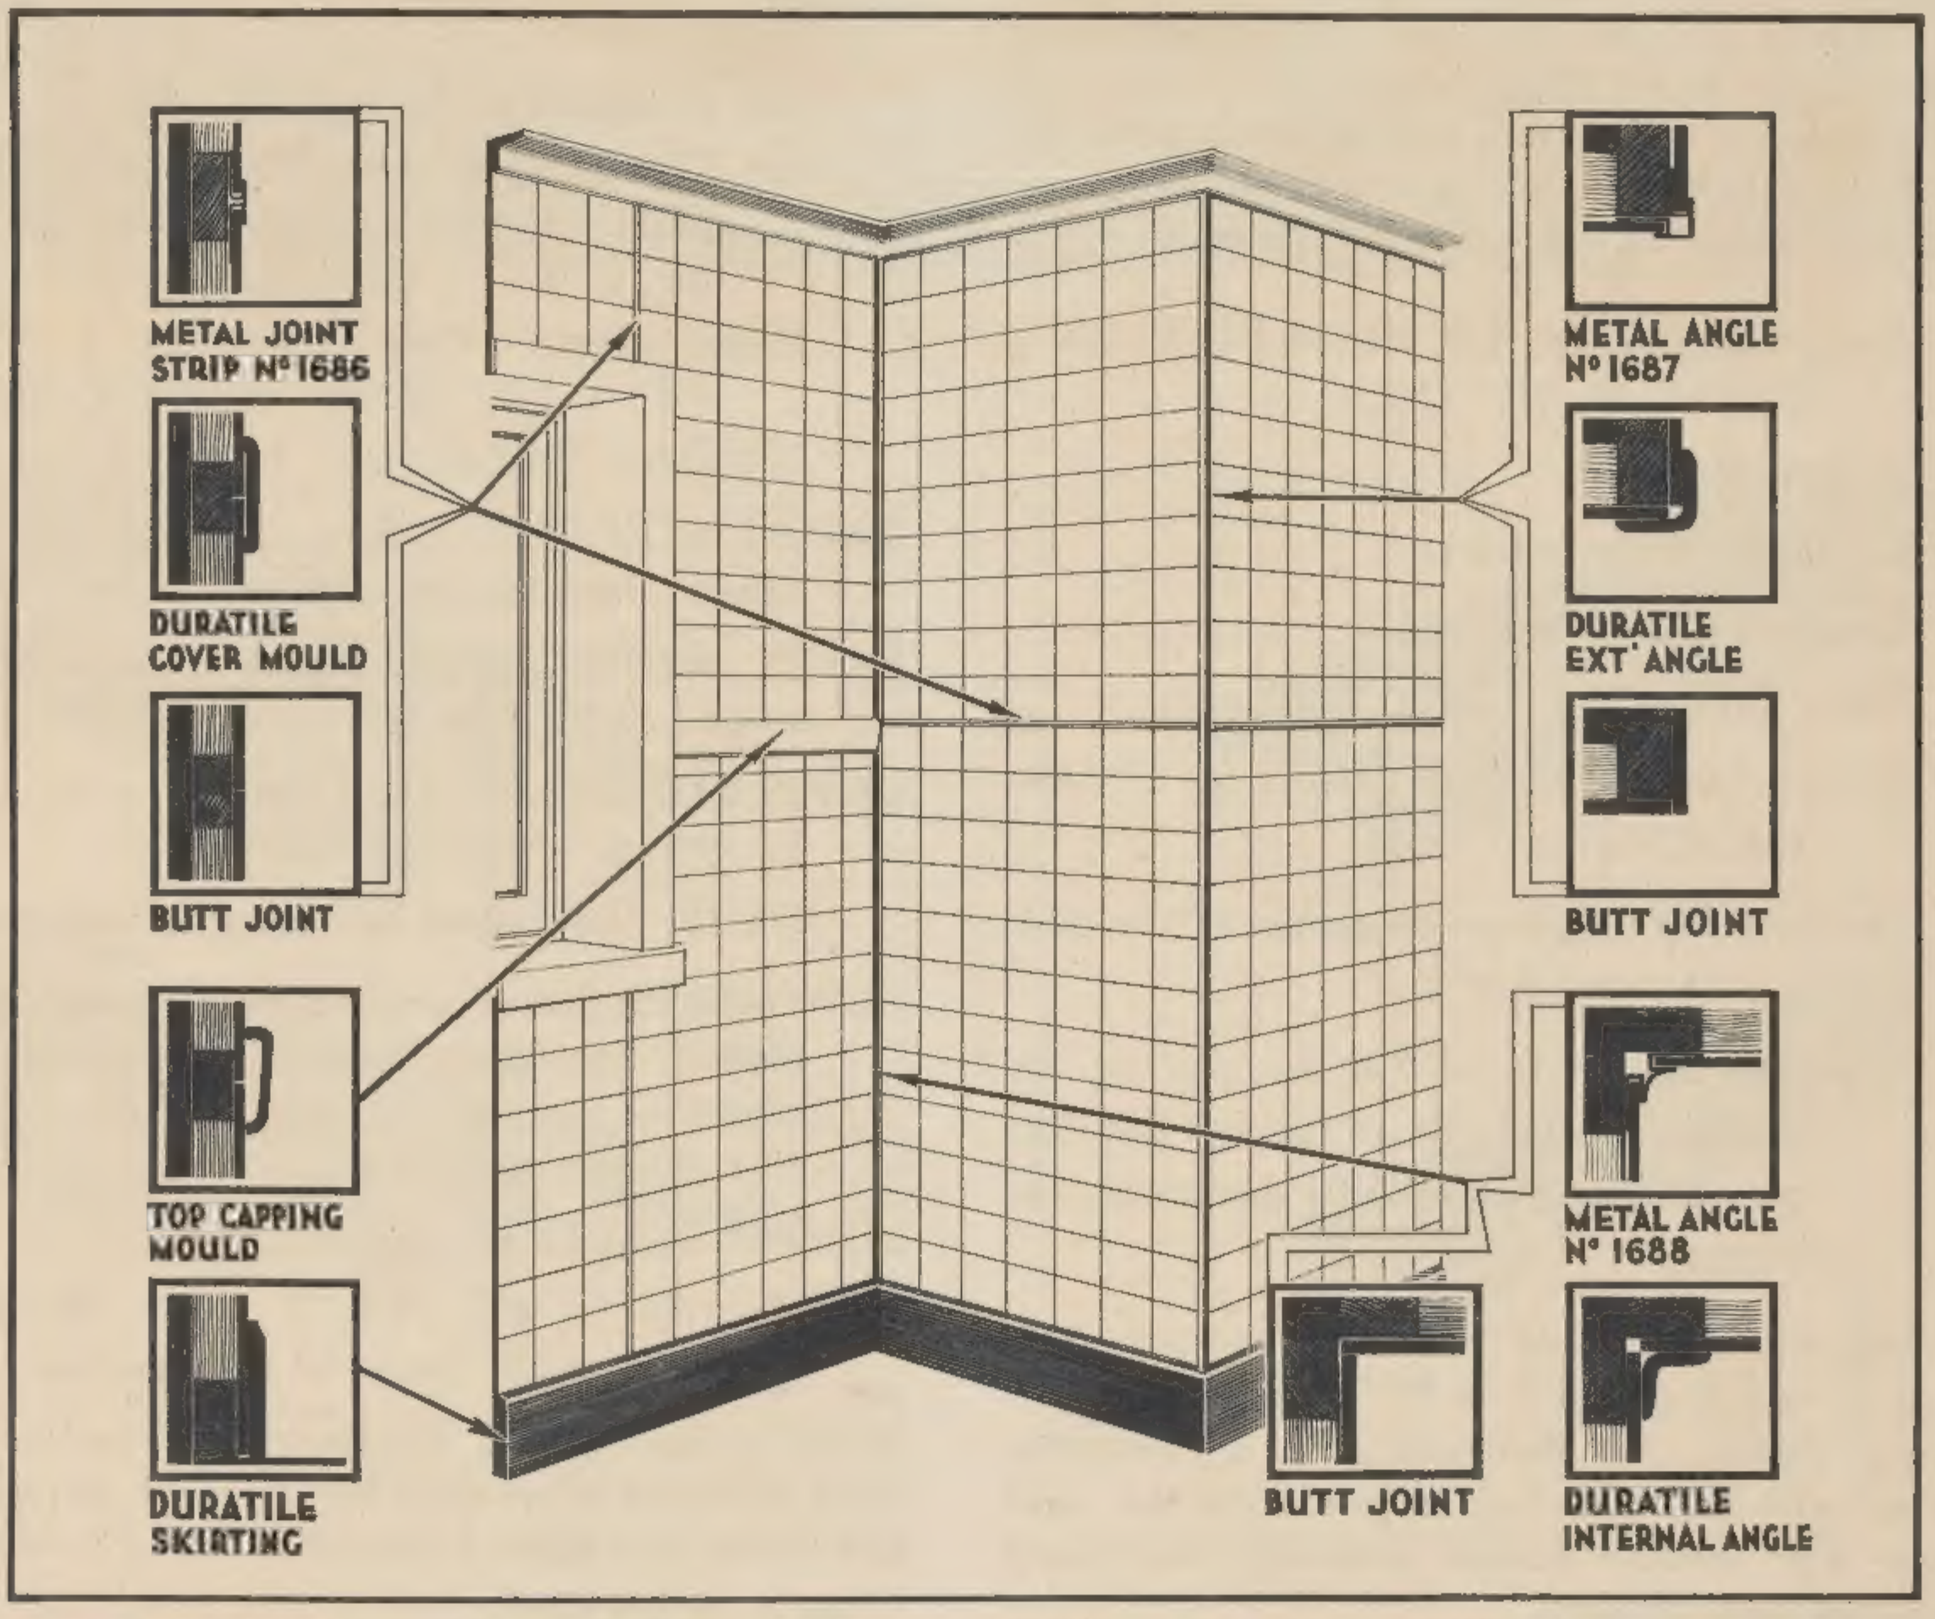

THE ABOVE DRAWING ILLUSTRATES THE SEVERAL METHODS OF FINISHING AT THE JOINTS OF DURATILE WALL TILE SHEETING

WUNDERLICH DEEP CORRUGATED DURABESTOS

5.75" PITCH ASBESTOS-CEMENT ROOFING & WALL SIDING SHEETS.

DEEP CORRUGATED DURABESTOS SHEETS.

WUNDERLICH DEEP CORRUGATED DURABESTOS is composed of Asbestos Fibre and Portland Cement. These components properly mixed and united result in a corrugated sheet of unique physical properties, pleasing grey-white appearance and permanence. It is strong, for the 5.75" pitch corrugations give the highest structural strength and maximum rigidity, of which the component materials are capable. It is highly resistant to fire, is unaffected by salt air and the weather, and under normal conditions will not corrode, rot or rust, or permit condensation of moisture. In addition, Corrugated Durabestos minimises the transmission of noise from rain and hail, and heat from the sun. The sheeting is economical in initial cost, fixing does not present difficulties and maintenance costs are practically nil. It is available in a range of convenient stock sizes, particulars of which are as follows:—

Stock Lengths: 5', 5'6", 6', 6'6", 7', 7'6", 8', 8'6", 9', 9'6", 10'.

Width: 3'5¼".

Thickness: ¼" (nominal).

Depth of Corrugation: 1⅞".

Pitch: 5.75".

Cover: For 2" Side Lap, 3'3½".; for 7" Side Lap, 2'10¼".

End Lap: For Roofing—Minimum 6"; for Siding—Minimum 4".

Weight: Bulk material 2.8 lbs. per sq. ft. approx. (uncrated); or approx. 280 lbs. per 100 sq. ft. (add 10 per cent. for crates).

Corrugated Durabestos is suitable for roofing all types of buildings, both in the domestic and industrial fields. An illustration of a residence roofed with the sheeting appears on the next page. For further details send for illustrated Technical Data Sheets.

DURABESTOS MOULDED ROOFING ACCESSORIES.

Durabestos (Asbestos Cement) Moulded Roofing Accessories ensure permanence. They are weather, rust and corrosion-proof, remain unaffected by sea air, and do not require painting. Service Sheets, giving full details of these accessories, are available on request. Stock sizes are as follows:—.

RIDGE CAPPING: Three types are available, viz.:—

Adaptable Angle, Two-piece: Fluted 12" x 12".

Stock lengths:

For 2" Side Lap Fixing 3'7½", Cover 3'3½".

For 7" Side Lap Fixing 3'3", Cover 2'10¼".

Adaptable Angle, Two-piece: Plain 8" x 8" to 12" x 12"; Stock Lengths 6'.

Fixed Angle, One-piece: 8" x 8" to 12" x 12"; Stock Lengths 6' and 8'.

Hip Caps, Starters, etc., to suit all types.

BARGE MOULDINGS: Several types are available in stock lengths of 6' and 8'.

EAVES BIRDPROOFING: Flat type serrated edge. Stock Size, 6"; Stock Length, 3'9¾".

EAVES GUTTERS: 4", 5", 6" and 8" wide. Stock Lengths 6'. Maximum Lengths, 8'.

NOTE: The collars are supplied separately.

DOWNPIPES: Either rectangular or round. (Bends, Junctions, Shoes) 3", 4", 5" and 6" diameter, and 3" x 2" and 4" x 2", 4" x 3", 4" x 4" in lengths of 6'.

LOUVRE BLADES of various types.

SKYLIGHTS: In 6', 6'6", 7', 7'6", 8', 8'6", 9', 9'6" and 10' sheets of Durabestos.

When ordering it is necessary to mention the pitch of the roof, whether left to right, or right to left fixing is adopted, and if 2" or 7" side lap fixing is to be used.

WUNDERLICH DEEP CORRUGATED DURABESTOS

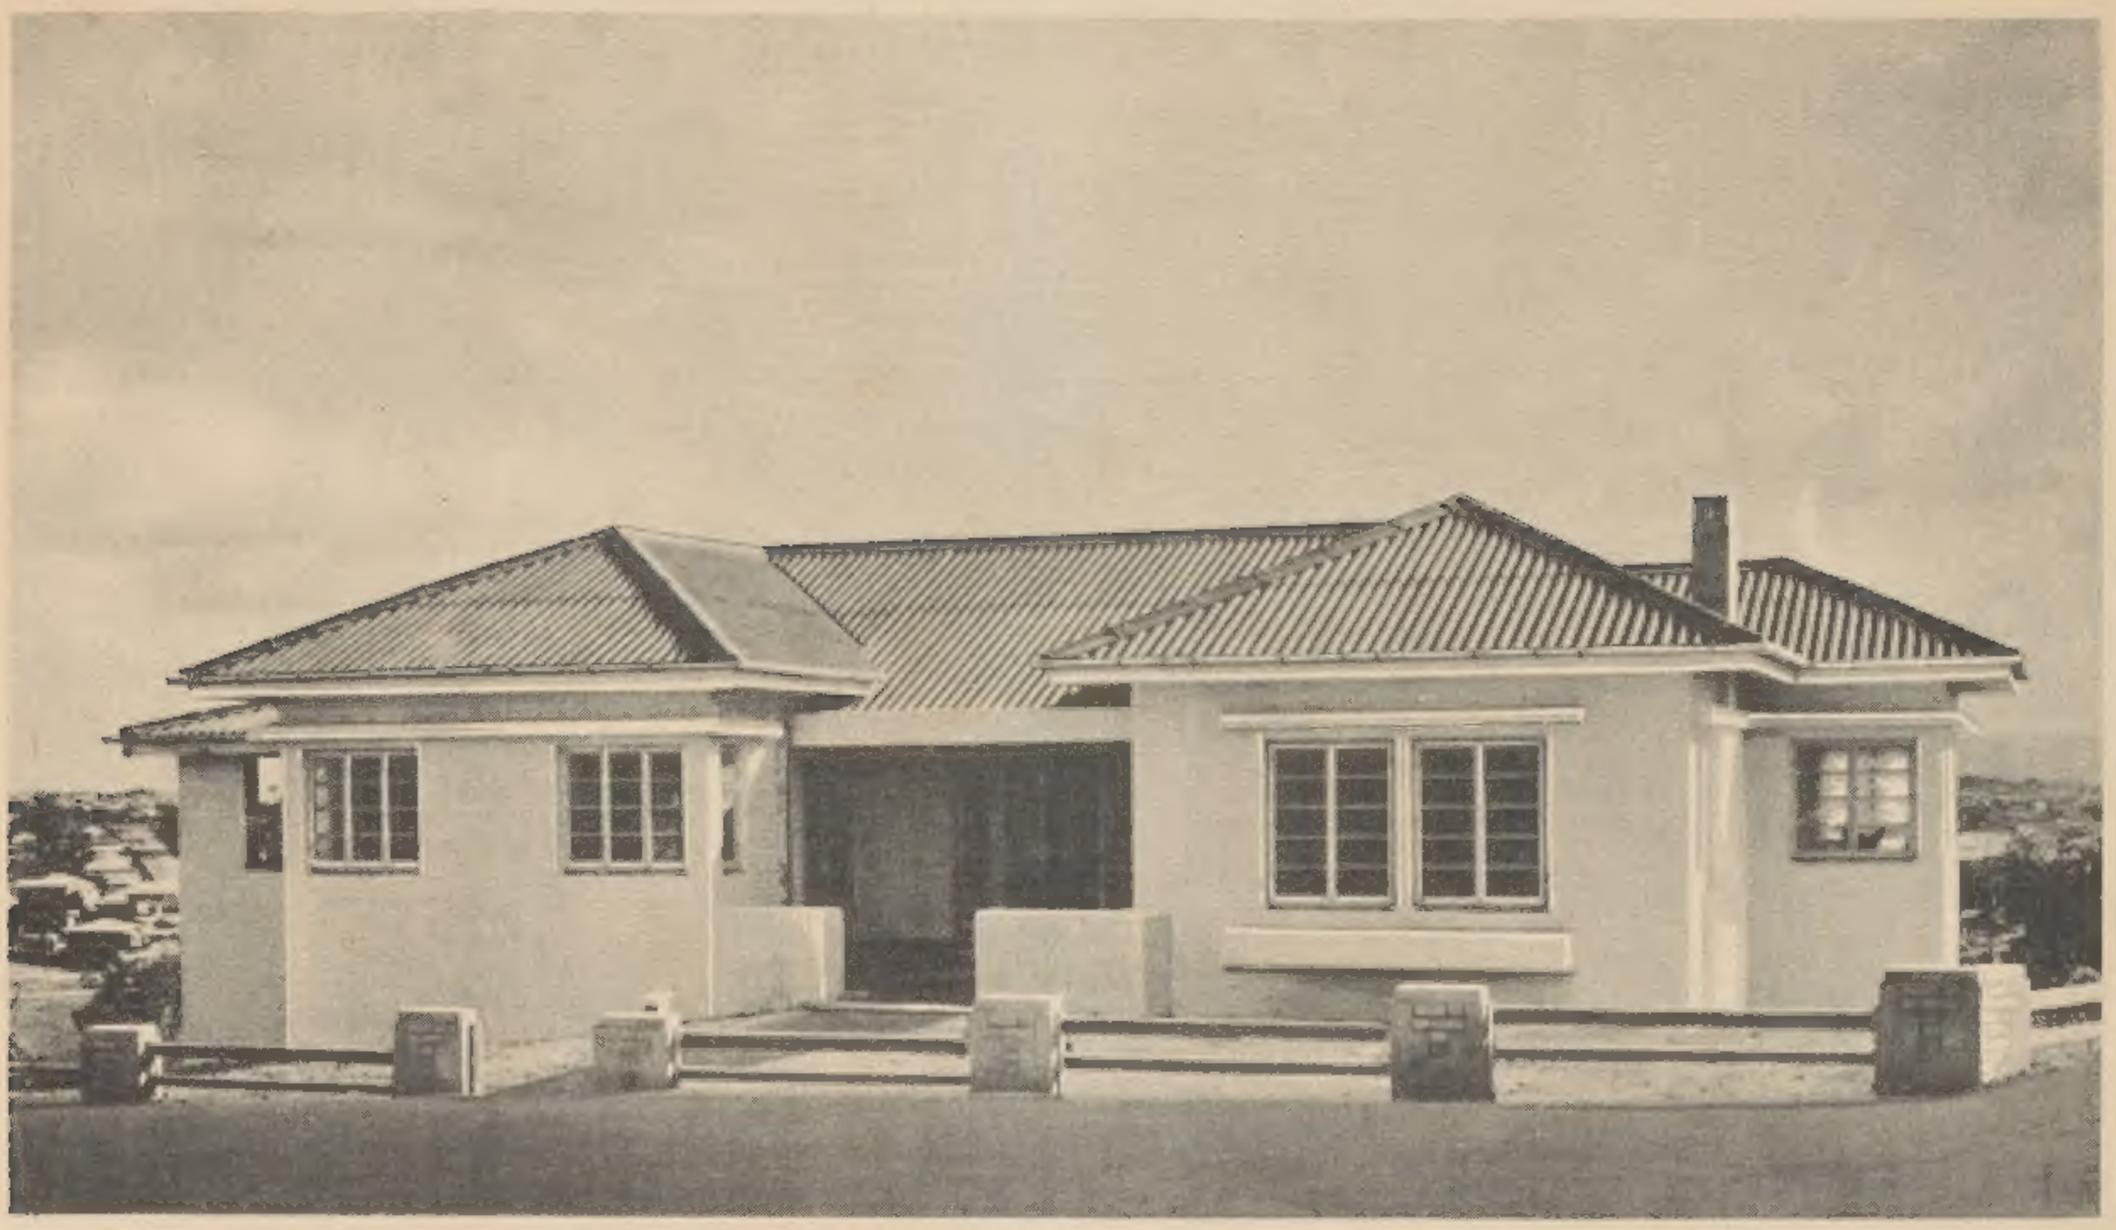

A WUNDERLICH DEEP CORRUGATED DURABESTOS ROOF TO A RESIDENCE AT CAMP HILL, BRISBANE, QUEENSLAND.

Architects: BLACKBURNE & GZELL. Builders: FISHER & TESCH.

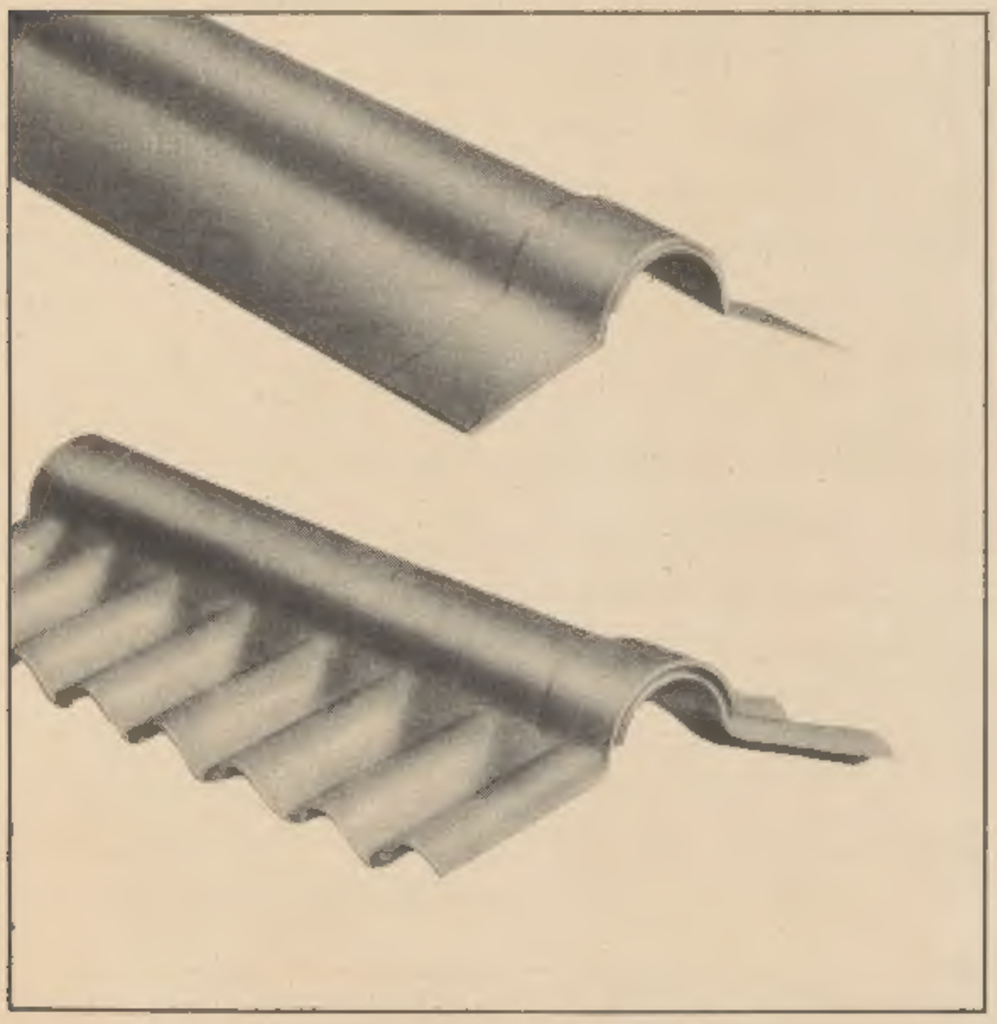

(1) DURABESTOS RIDGING—ADAPTABLE ANGLE. TWO-PIECE, PLAIN.

(2) DURABESTOS RIDGING—ADAPTABLE ANGLE. TWO-PIECE, FLUTED.

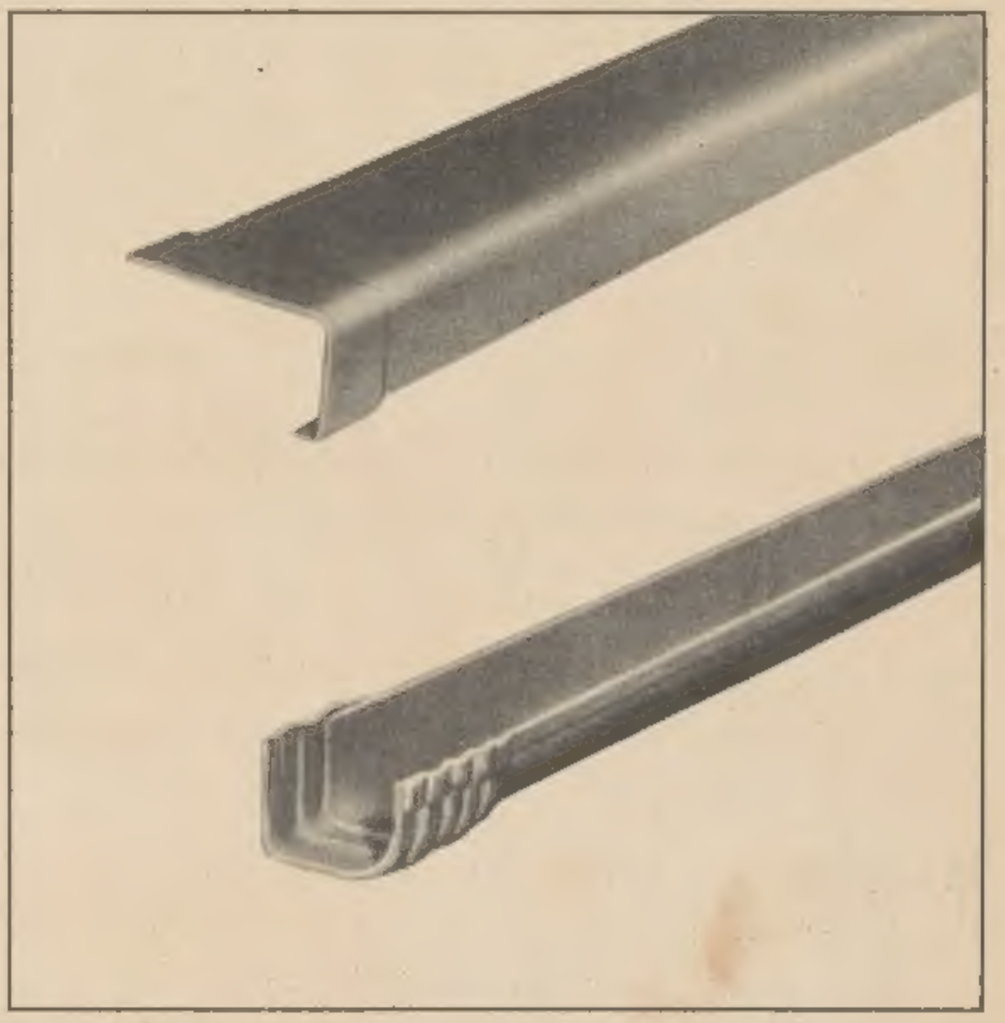

(1) DURABESTOS BARGE MOULD.

(2) DURABESTOS EAVES GUTTER.

WUNDERLICH DEEP CORRUGATED DURABESTOS

WUNDERLICH MANUFACTURES

INCLUDE

ASBESTOS-CEMENT PRODUCTS.

DURABESTOS FLAT BUILDING SHEETS
DURABESTOS COVER MOULDS AND ANGLES
DEEP CORRUGATED DURABESTOS SHEETS
DURABESTOS RIDGE CAPPING, GUTTERS
DOWNPIPES, BARGE MOULDS, SKYLIGHTS
ROOF VENTILATORS, ETC.
DURATILE WALL TILE SHEETING
INSULABESTOS DOUBLE-FACED INSULATING SHEETS
DURAVENEER IN MAPLE AND WALNUT
ASBESTOS MILLBOARD

METAL PRODUCTS.

METAL CEILINGS AND WALL LININGS
METAL AWNING FASCIAS
ARCHITECTURAL SHEET METALWORK
ARCHITECTURAL CAST METALWORK
(including Heat-Treated Aluminium Alloys)
SHOPFRONTS AND SHOWCASES
METAL DOORS AND DOOR FRAMES
PRESSED STEEL PARTITIONS
MAIL CHUTES AND LETTER BOXES
METAL LETTERS—CAST, AND ENAMELLED OR BUILT
METAL NAMEPLATES AND MEMORIALS
WUNDERGLAZE—ELECTRO COPPER—GLAZING
ROOF LIGHTS, LAY LIGHTS AND WALL LAMPS
VENTILATORS, VENTILATING SHEETING
METAL WINDOW HOODS, SKYLIGHTS GLAZING BARS
ETC.

TERRA-COTTA PRODUCTS.

ROOFING TILES AND SHINGLES
ARCHITECTURAL TERRA-COTTA FAIENCE
MACHINE-MADE TERRA-COTTA
ENAMELLED FACE BRICKS
COLORTEX BRICKS AND BRICKETTES
STONEWARE PIPES AND FITTINGS
PATERA ROUNDELS AND VASES
ETC.

Call and examine representative collections of the foregoing products at any of our Showrooms

WUNDERLICH LIMITED

S. T. LEIGH & CO. PTY. LTD., PRINTERS, SYDNEY